

A Critical Look at



Surgical Case Carts

Single- & Double-Width Stainless Steel Case Carts • Internal & External Components

Serving the industry since 1993

6"-diameter plate casters ... Interlocking cabinet design ... Stainless steel interchangeable chassis ... Double-panel reinforced doors with drainage ... Removable/adjustable latches ... Stainless steel roller bearing drawer slides ... Internal adjustable shelves with shelf lock ... Individually-replaceable components ... See inside for more standard features



Material Handling, Healthcare & Cleanroom Equipment

100 Industrial Blvd.
Clayton, DE 19938
Ph: 800-637-5100
www.eaglegrp.com




double-width cart shown with pull-out shelves

Features and Benefits

CLICK TO
WATCH THE
VIDEO



Double-Width Carts

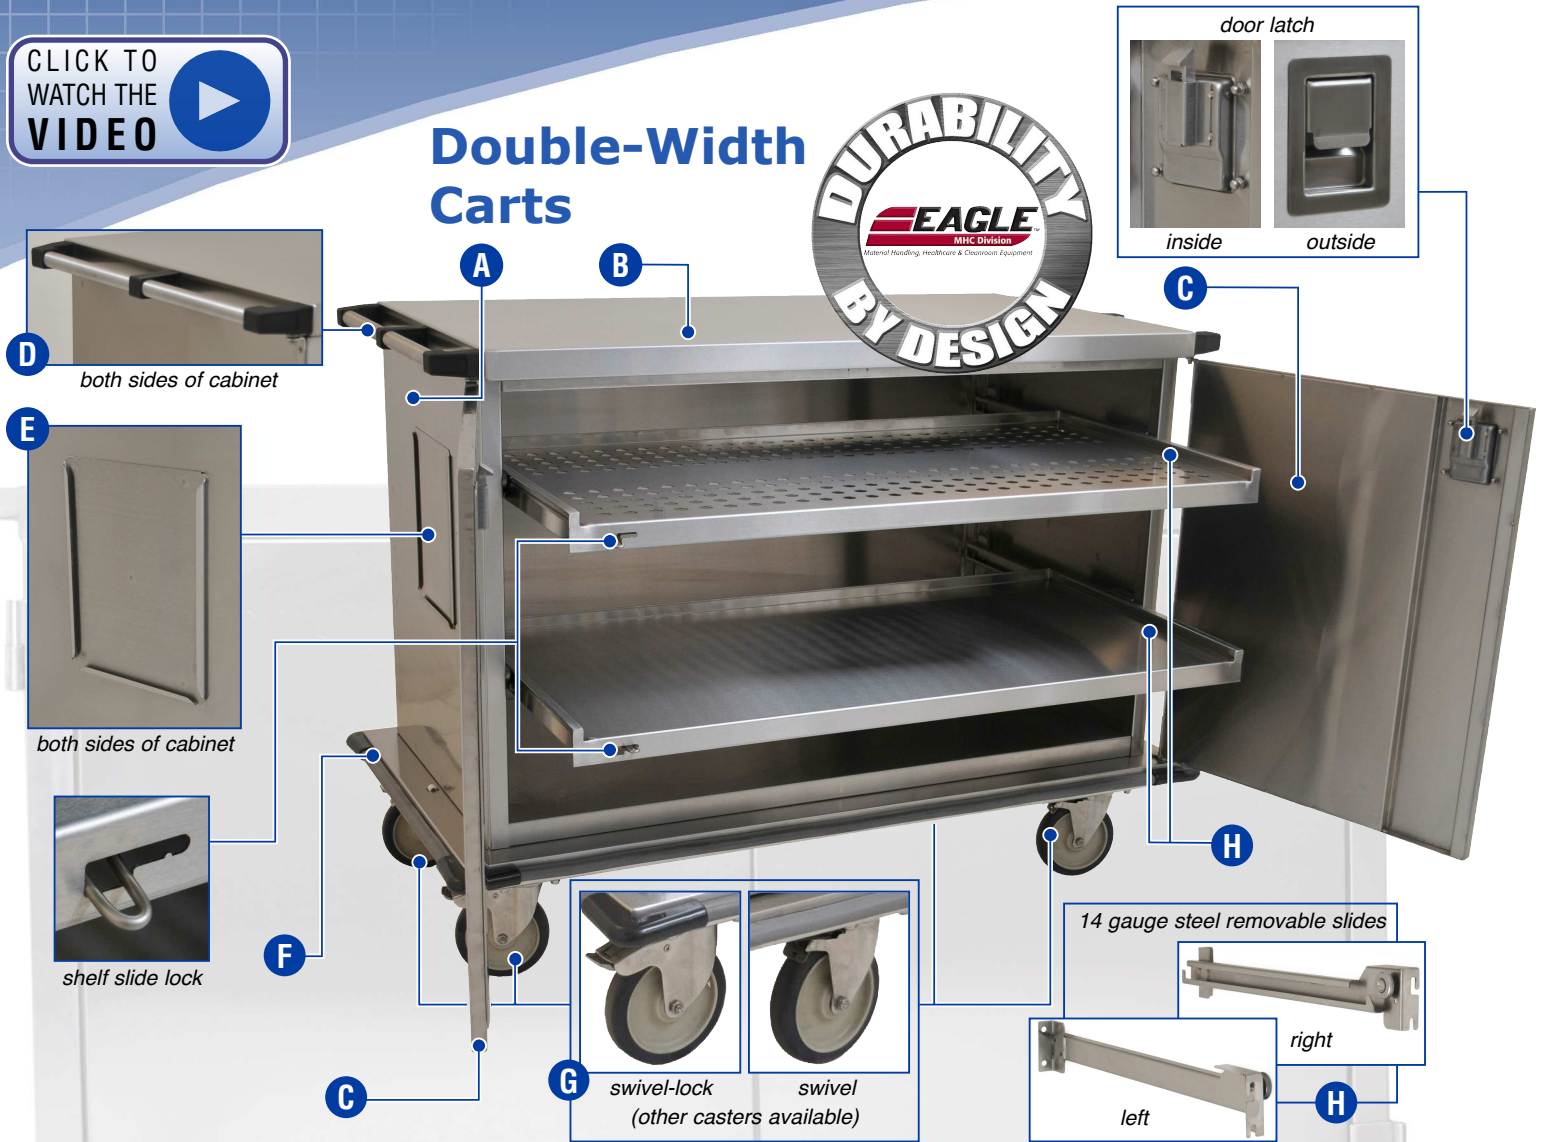

STANDARD FEATURES — Please note: ***Bold/italicized text*** indicates what most competitors do not have as standard.

- A Cabinet** — 18 gauge type 300 stainless steel; Hemmed safety edges on all openings; ***Interlocking construction***, for a rigid and quieter cabinet, absorbs vibrations, prevents body torque and warping; Integrated weep holes promote drainage.
- B Top** — 16 gauge type 300 stainless steel; reinforced with hemmed C-channels.
- C Doors** — 20 gauge stainless steel; Double-panel; Integral drain system; Reinforced with X-channels; Doors swing 270° open (all the way to the side of the cabinet); ***Field-replaceable spring-loaded nylon roller latches*** hold doors open.
- D Handles** — Protruded, ***field-replaceable*** heavy duty nylon fiberglass with center brackets, one on each side of cabinet.
- E Document Holders** — 8.5" x 11" letter-size; Stainless steel; One on each side of cabinet; Optional sizes available.
- F Dolly Frame** — 16 gauge stainless steel 2" square tubing; 12 gauge caster mounting plates; Non-marring bumper with ***field-replaceable individual reinforced corners*** prevent damage to cabinet and nearby walls.
- G Casters** (see "Step 2" on back page) — Stainless steel fork; ***6"-diameter wheels***; Polyurethane tread; Grease fittings; Cart-washable; Swivel casters available include casters with brake and swivel-lock casters, which prevent case cart from "fishtailing" during transport.
- H Internal Shelves** (see "Step 3" on back page) — 14 gauge ***slides with stainless steel high-temperature bearings***; Shelf slide lock prevents shelf and contents from sliding out of cabinet; Removable—or adjustable in 2" increments—with no tools required; Offered are perforated stainless steel, solid stainless steel, and heavy gauge wire shelves.

Features and Benefits

Single-Width Carts

CLICK TO
WATCH THE
VIDEO



STANDARD FEATURES — Please note: ***Bold/italicized text*** indicates what most competitors do not have as standard.

- A Cabinet** — 18 gauge type 300 stainless steel; Hemmed safety edges on all openings; ***Interlocking construction***, for a rigid and quieter cabinet, absorbs vibrations, prevents body torque and warping; Integrated weep holes promote drainage.
- B Top** — 16 gauge type 300 stainless steel; reinforced with hemmed C-channels.
- C Door** — 20 gauge stainless steel; Double-panel; Integral drain system; Reinforced with X-channels; Door swings 270° open (all the way to the side of the cabinet); ***Field-replaceable spring-loaded nylon roller latch*** holds door open.
- D Handle** — Recessed, stainless steel, located at left-hand side of cabinet.
- E Document Holder** — 8.5" x 11" letter-size; Stainless steel; located at right-hand side of cabinet; Optional sizes available.
- F Dolly Frame** — 16 gauge stainless steel 2" square tubing; 12 gauge caster mounting plates; Non-marring bumper with ***field-replaceable individual reinforced corners*** prevent damage to cabinet and nearby walls.
- G Casters** (see "Step 2" on back page) — Stainless steel fork; ***6"-diameter wheels***; Polyurethane tread; Grease fittings; Cart-washable; Swivel casters available include casters with brake and swivel-lock casters, which prevent case cart from "fishtailing" during transport.
- H Internal Shelves** (see "Step 3" on back page) — 14 gauge ***slides with stainless steel high-temperature bearings***; Shelf slide lock prevents shelf and contents from sliding out of cabinet; Removable—or adjustable in 2" increments—with no tools required; Offered are perforated stainless steel, solid stainless steel, and heavy gauge wire shelves.


Some of our advantages...

CLICK TO WATCH THE VIDEO



WHAT WE HAVE...


Shelf slides with stainless high-temperature bearings for better mobility



left slide



perforated shelf shown with slides



right slide

WHAT THEY HAVE...

Friction slides




WHAT WE HAVE...

Interlocking cabinet design with stainless steel interchangeable chassis and square tubing




interchangeable chassis

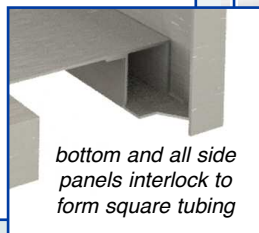

bottom and all side panels interlock to form square tubing

WHAT WE HAVE...

6"-diameter casters for better maneuverability

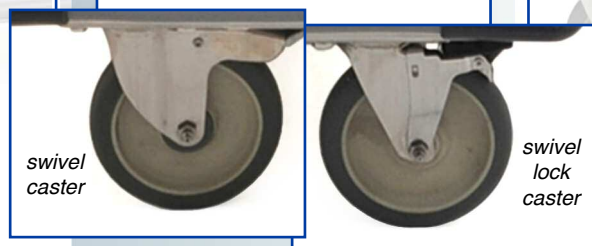

swivel caster

swivel lock caster

WHAT THEY HAVE...

Angle frame or unibody, which will warp over time.

WHAT THEY HAVE...

5"-diameter casters

WHAT WE HAVE...

Unmatched replaceability of individual components!

WHAT THEY HAVE...

If a component goes bad, entire cart must be replaced!

To order a cart...

CLICK TO
WATCH THE
VIDEO



Step 1 Select cart body.

- Type 300 series stainless steel construction
- Double-panel reinforced doors with removable positive latching system
- Bumper with reinforced corners
- Letter-size document holder
- Push handles



SINGLE-WIDTH CARTS...

OUTSIDE DIMENSIONS OF CABINET			OVERALL DIMENSIONS			model #
front-to-back	end-to-end	height	front-to-back	end-to-end	height*	
24 ³ / ₄ "	24"	21 ³ / ₄ "	30"	29"	31 ¹ / ₂ "	ELCSC-1
24 ³ / ₄ "	24"	30 ³ / ₄ "	30"	29"	40 ¹ / ₂ "	ELCSC-2
24 ³ / ₄ "	24"	47 ³ / ₄ "	30"	29"	57 ¹ / ₂ "	ELCSC-3

DOUBLE-WIDTH CARTS...

OUTSIDE DIMENSIONS OF CABINET			OVERALL DIMENSIONS			model #
front-to-back	end-to-end	height	front-to-back	end-to-end	height*	
24 ³ / ₄ "	39"	47 ³ / ₄ "	30"	46"	57 ¹ / ₂ "	ELCSC-4
24 ³ / ₄ "	39"	30 ³ / ₄ "	30"	46"	40 ¹ / ₂ "	ELCSC-5
24 ³ / ₄ "	49"	30 ³ / ₄ "	30"	55"	40 ¹ / ₂ "	ELCSC-6

* Heights include 6"-diameter casters. See Step 2 for casters.

Custom sizes available. Contact factory.

Step 2 Select casters.

Stainless steel. 6"-diameter wheel. Set of four.

description	add suffix # *
two swivel casters, two swivel with brake	-SWB
one swivel caster, one with brake, two swivel-lock	-SWBL

* Example: ELCSC-1-SWB



swivel
caster



swivel-lock
caster

Other caster configurations available. Contact factory.

Step 3 Select internal shelves.



PERFORATED SHELF

Stainless steel. 3/4"-diameter perforations.

description	model #
for Single-Width Carts	ELCSCS-P
for Double-Width Carts	ELCSCD-P
for Extended Double-Width Carts	ELCSCE-P



WIRE SHELF

Stainless steel heavy gauge wire.

description	model #
for Single-Width Carts	ELCSCS-W
for Double-Width Carts	ELCSCD-W
for Extended Double-Width Carts	ELCSCE-W



SOLID SHELF

Heavy gauge type 300 stainless steel.

description	model #
for Single-Width Carts	ELCSCS-S
for Double-Width Carts	ELCSCD-S
for Extended Double-Width Carts	ELCSCE-S



MHC Division: Phone (800) 637-5100 • FAX (302) 653-2065

Corporate Headquarters:

100 Industrial Boulevard • Clayton, DE

19938-8903 USA • Phone: (302) 653-3000

www.eaglegrp.com

