



Profit from the Eagle Advantage®

# Specification Sheet


## Short Form Specifications

Eagle Master Trak® Overhead Track Storage System to consist of front and rear track sections and all hardware. Mobile units to consist of posts, casters, and all parts and hardware necessary to connect unit to tracks. Stationary units on each end consist of posts, footplates and hardware necessary to connect unit to tracks. All shelves sold separately.

### PATENTED Unique Roller Design

(patent #5,680,942)

- Easy rolling.
- Eliminates binding due to uneven floors.
- Supports track.

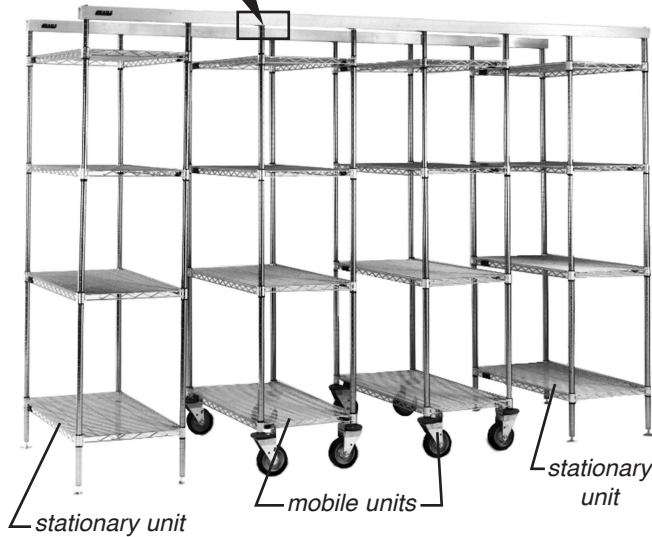

## Options / Accessories

- Ledges
- Dividers
- Shelf markers
- Rods & tabs

## EAGLE GROUP

100 Industrial Boulevard  
Clayton, DE 19938-8903 USA

Phone: 302-653-3000 • 800-441-8440

Fax: 302-653-2065

www.eaglegrp.com • www.eaglemhc.com

For custom configuration or fabrication needs, contact our SpecFAB® Division.

Phone: 302-653-3000 • Fax: 302-653-2065 • e-mail: quotes@eaglegrp.com

Item No.: \_\_\_\_\_  
 Project No.: \_\_\_\_\_  
 S.I.S. No.: \_\_\_\_\_

# Master Trak® Overhead Track High-Density Storage System

## MODEL:

- EP74-\*       MUK18-\*       MUK24-\*       MUK36-\*
- EP86-\*       MUK21-\*       MUK30-\*       OHT-\*

\* See charts on back page for full model numbers.

## Design and construction features

- Patented QuadTruss® design (patent #5,390,803) makes shelves\* up to 25% stronger and provides a retaining ledge for increased storage stability and product retention.
- Unique roller assembly (patent #5,680,942) eliminates binding which can occur in other track systems and allows longer track length without a stationary intermediate unit.
- Maximum storage in a minimum of space.
- Quick and easy assembly.
- Requires only single-aisle access.
- Provides for easier cleaning with safe access to all units.
- Wide selection of shelving\* sizes and finishes, including EAGLEbrite® zinc, chrome, Valu-Master® gray epoxy, and EAGLEgard® (with MICROGARD® antimicrobial protection) green epoxy.

## Overhead Track Kits

- Includes all necessary sections of front and rear tracks for assembling lengths of 6' to 21', plus all hardware.
- Any kits 9' or longer include two or more front and rear track sections with joiner pieces and all hardware.
- A mid-stationary unit is recommended on lengths of over 30'.
- Kits 13' (3962mm) and longer are wood-crated.
- Special lengths available.

## Stationary End/Intermediate Unit Kits\*

- Includes all hardware and posts necessary for connecting stationary units to track.
- Units must be anchored to the floor to prevent movement.
- One kit required for each stationary unit.

## Mobile Unit Kits\*

- Includes posts, casters and all parts and necessary hardware.
- Casters are 5" x 1 1/2", with polymer tread.
- One kit required for each mobile unit.

\*Shelves sold separately.

## Certifications / Approvals




AutoQuotes





Item No.: \_\_\_\_\_  
 Project No.: \_\_\_\_\_  
 S.I.S. No.: \_\_\_\_\_

# Master Trak® Overhead Track High-Density Storage System

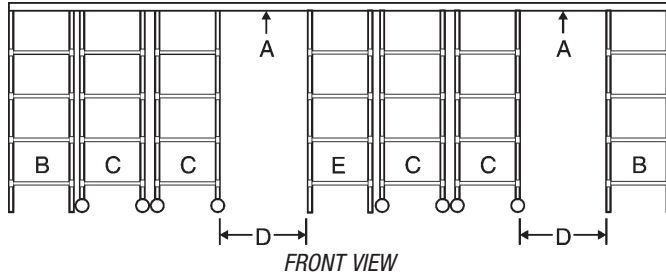

- A:** Overhead Track Kits
- B:** Stationary End Units
- C:** Mobile Units
- D:** Open aisle—30" to 36" (762 to 914mm) is recommended
- E:** Stationary Mid Unit (optional—use same model # as Stationary End Unit Kit)

## Overhead Track Kits

model #	length	weight	model #	length	weight
	ft.	mm		ft.	mm
OHT-6	6'	1829	OHT-14	14'	4267
OHT-7	7'	2134	OHT-15	15'	4572
OHT-8	8'	2438	OHT-16	16'	4877
OHT-9	9'	2743	OHT-17	17'	5181
OHT-10	10'	3048	OHT-18	18'	5486
OHT-11	11'	3353	OHT-19	19'	5791
OHT-12	12'	3658	OHT-20	20'	6096
OHT-13	13'	3962	OHT-21	21'	6401

### Safety Notes:

- Stationary End/Intermediate Units must have a minimum of four shelves. Mobile units should have top shelf positioned as close to track as possible.
- The width of the Stationary End/Intermediate Units should be the same or bigger than the width of the mobile units.
- Standard Master Trak® systems require 74" (1880mm) posts on the Stationary End/Intermediate Units. Shelves sold separately.
- 900 lbs. (408 kg) total is the max weight capacity for Mobile Units.
- Recommended aisle widths are 30"-36" (762-914mm). However, larger items stored within the system may require an aisle width over 36" (914mm).

## Stationary End/Intermediate Unit Kits...

### ...WITH 74"-HIGH POSTS

EAGLEbrite®	chrome	EAGLEgard®	weight
model #	model #	model #	lbs.
EP74-Z *	EP74-C	EP74-E	17

### ...WITH 86"-HIGH POSTS

EAGLEbrite®	chrome	EAGLEgard®	weight
model #	model #	model #	lbs.
EP86-Z *	EP86-C	EP86-E	21

\* Can be used with both EAGLEbrite® and Valu-Master® shelves.

## Mobile Unit Kits...

Offset rigid poly caster replacement available: Model #CSRO5P-300

### ...WITH 74"-HIGH POSTS \*

EAGLEbrite®	chrome	EAGLEgard®	width	weight
model #	model #	model #	in.	lbs.
MUK18-Z	MUK18-C	MUK18-E	18"	33
MUK21-Z	MUK21-C	MUK21-E	21"	34
MUK24-Z	MUK24-C	MUK24-E	24"	35
MUK30-Z	MUK30-C	MUK30-E	30"	35
MUK36-Z	MUK36-C	MUK36-E	36"	36

### ...WITH 86"-HIGH POSTS \*

EAGLEbrite®	chrome	EAGLEgard®	width	weight
model #	model #	model #	in.	lbs.
MUK18-Z86	MUK18-C86	MUK18-E86	18"	37
MUK21-Z86	MUK21-C86	MUK21-E86	21"	38
MUK24-Z86	MUK24-C86	MUK24-E86	24"	39
MUK30-Z86	MUK30-C86	MUK30-E86	30"	39
MUK36-Z86	MUK36-C86	MUK36-E86	36"	40

\* Casters included in post heights

NOTE: Master Trak® units must be mounted to allow proper clearance from wall or other obstructions that would hinder operation of mobile units. Walls must be plumb and straight to prevent contact with mobile units. Floors must be flat, level and smooth. Failure to comply will void the warranty of the Master Trak® Storage System.

Master Trak® not recommended for use in carpeted areas.

## EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA  
 Phone: 302-653-3000 or 800-441-8440 • Fax: 302-653-2065  
 www.eaglegrp.com • www.eaglemhc.com

Printed in U.S.A.  
 ©2022 by Eagle Group

Rev. 05/22

Spec sheets available for viewing, printing or downloading from our online literature library at [www.eaglegrp.com](http://www.eaglegrp.com)

Although every attempt has been made to ensure the accuracy of the information provided, we cannot be held responsible for typographical or printing errors. Information and specifications are subject to change without notice. Please confirm at time of order.