

Profit from the Eagle Advantage®

# **Specification Sheet**

## **Short Form Specifications**

Eagle Tab Lock Wall Shelf, model \_\_\_\_\_. Constructed of 16 gauge type 430 stainless steel, with 1½" roll on front and 1½" upturn on rear and ends. Stainless steel mounting brackets with tab lock for easy assembly.

Item No.:	
Project No.:	
S.I.S. No.:	

# **Wall Shelves with Tab Lock**

#### MODELS:

- □ *WS1024TL*
- ☐ WS1036TL
- ☐ WS1048TL
- **☐** WS1060TL
- ☐ WS1224TL
- **☐** WS1236TL
- ☐ WS1248TL
- **□** WS1260TL



wall shelf with tab lock

### **Design and Construction Features**

- Die-formed stainless steel mounting brackets with tab lock design for ease of assembly.
- Available in 10" and 12" (254 and 305mm) widths\*, and lengths\*\* ranging from 24" to 60" (610 to 1524mm).
- 16 gauge type 430 stainless steel polished to #3 finish.
- 1½" (38mm) roll on front.
- 1½" (38mm) upturn on rear and ends.
  - \* Not available in other widths.
  - \*\* 60" (1524mm) maximum length available.

EAGLE GROUP 100 Industrial Boulevard Clayton, DE 19938-8903 USA Phone: 302-653-3000 • 800-441-8440

Fax: 302-653-2065

www.eaglegrp.com • www.eaglemhc.com

For custom configuration or fabrication needs, contact our **SpecFAB® Division**. Phone: 302-653-3000 • Fax: 302-653-2065 • e-mail: quotes@eaglegrp.com

Certifications / Approvals

NSF.





EG02.09 Rev. 08/22



Item No.:	
Project No.:	
S.I.S. No.:	

# **Wall Shelves with Tab Lock**



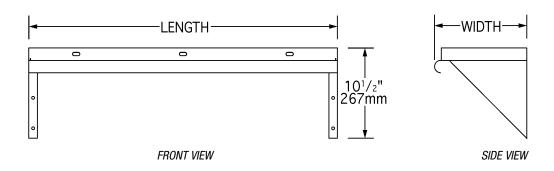

	width*		length**		weight	
model #	in.	mm	in.	mm	lbs.	kg
WS1024TL	10″	254	24"	610	10	4.5
WS1036TL	10″	254	36″	914	12	5.4
WS1048TL	10″	254	48″	1219	15	6.8
WS1060TL	10″	254	60″	1524	20	9.0
WS1224TL	12″	305	24"	610	12	5.4
WS1236TL	12″	305	36″	914	14	6.4
WS1248TL	12″	305	48″	1219	17	7.7
WS1260TI	12″	305	60″	1524	21	9.5

<sup>\*</sup> Not available in other widths.

### **EAGLE GROUP**

100 Industrial Boulevard, Clayton, DE 19938-8903 USA Phone: 302-653-3000 or 800-441-8440 • Fax: 302-653-2065

www.eaglegrp.com • www.eaglemhc.com

Printed in U.S.A. ©2022 by Eagle Group

Rev. 08/22

<sup>\*\* 60&</sup>quot; (1524mm) maximum length available.