

Specification Sheet

Short Form Specifications

Eagle One-Compartment Sink, model_______, with 2"-wide "Euro-Style" edging on front and sides. Sink bowl is heavy gauge type 304 stainless steel, with 13½" water level, deep drawn, seamless and have all corners coved. Top—including backsplash, and drainboards (when required)—is heavy gauge type 430 stainless steel. Drainboards shall be "V" creased for positive drainage. 9½" high backsplash with 1" upturn and tile edge. Legs to be 1½" 0.D. galvanized tubing with front-to-back crossbracing, and 1" high impact plastic adjustable bullet feet.



Options / Accessories

- Stainless steel legs
- ☐ Stainless steel bullet feet
- Lever drains
- Twist handle drains
- Twist drain brackets
- ☐ Faucets
- ☐ Sink covers☐ Waste outlets
- ☐ Sink kits
- ☐ Overflow hole

EAGLE GROUP

100 Industrial Boulevard Clayton, DE 19938-8903 USA

Phone: 302-653-3000 • 800-441-8440

Fax: 302-653-2065

www.eaglegrp.com • www.eaglemhc.com

For custom configuration or fabrication needs, contact our **SpecFAB® Division.** Phone: 302-653-3000 • Fax: 302-653-2065 • e-mail: guotes@eaglegrp.com

Item No.:	
Project No.:	
S.I.S. No.:	

414 Series Coved Corner One-Compartment Sinks

MODELS:

414-16-1	□ 414-18-1	□ 414-22-1	414-24-1
414-16-1-18	□ 414-18-1-18	□ 414-22-1-18	□ 414-24-1-18
☐ 414-16-1-18L	🗆 414-18-1-18L	☐ 414-22-1-18L	☐ 414-24-1-18L
☐ 414-16-1-18R	🗆 414-18-1-18R	☐ 414-22-1-18R	☐ 414-24-1-18R
414-16-1-24	414-18-1-24	414-22-1-24	414-24-1-24
🗖 414-16-1-24L	🗖 414-18-1-24L	☐ 414-22-1-24L	☐ 414-24-1-24L
☐ 414-16-1-24R	☐ 414-18-1-24R	☐ 414-22-1-24R	☐ 414-24-1-24R

Materials

- Sink bowl: Heavy gauge type 304 stainless steel.
- Top: Drainboards, backsplash and euro-style edging are heavy gauge type 430 stainless steel.
- Legs: 1% (41mm)-diameter heavy-gauge galvanized tubing with plated 12-gauge gussets and high-impact corrosion resistant fully adjustable bullet feet - crossbracing is 1" (25mm)-diameter heavy-gauge galvanized tubing.

Design and Construction Features

- Bowl features deep-drawn one-piece seamless construction, using state-of-the-art hydraulic presses.
- Sink bowl has generous radius with a minimum dimension of 3" (76mm) and are rectangular for maximum capacity.
- New 20" x 16" (508 x 406mm) bowl design, with enhanced polishing techniques.
- 13½" (343mm) water level is standard.
- Swirl-away drainage.
- Leg gusset assemblies welded adjacent to sink bowl for maximum weight support and stability.
- 9½" (241mm) standard backsplash includes 1" (25mm) upturn and tile edge for easy installation and feathering to wall/splash surface.
- "V" creased drainboards for positive drainage.

Mechanical:

- Water supply is ½" (13mm) IPS for hot and cold lines.
- Faucet holes are 1½" (29mm) punched on 8" (203mm) centers.
- Basket-type waste drain included fits sink bowl's 3½" (89mm) opening and features 1½" (38mm) outlet.

Certifications / Approvals








EG20.23 Rev. 09/22




Item No.:	
Project No.:	
S.I.S. No.:	

414 Series Coved Corner One-Compartment Sinks





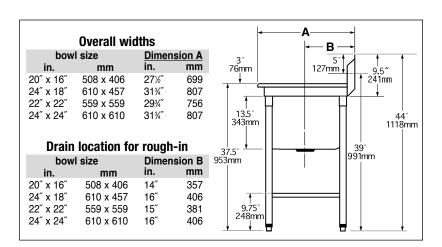

Please note the pair of legs located under the OUTER area of drainboard (only on one-compartment sinks with one drainboard)

	BOV	VL DIN		IONS igth	DRAIN		RD igth	OVEF wid		DIMENS len		 we	ight
model #	in.	mm	in.	mm	quantity	in.	mm	in.	mm	in.	mm	lbs.	kg
414-16-1	20″	508	16″	406	0		-	27½"	699	23¼"	591	93	42.2
414-16-1-18R or L	20″	508	16″	406	1	18″	457	27½"	699	38%"	987	96	43.6
414-16-1-18	20″	508	16″	406	2	18″	457	27½"	699	54½"	1384	133	60.3
414-16-1-24R or L	20″	508	16″	406	1	24"	610	27½"	699	447/8"	1140	99	44.9
414-16-1-24	20″	508	16″	406	2	24"	610	27½″	699	66½"	1689	135	61.2
414-18-1	24"	610	18″	457	0		-	31¾″	807	25½"	648	95	43.1
414-18-1-18R or L	24"	610	18″	457	1	18″	457	31¾"	807	40¾"	1035	110	49.9
414-18-1-18	24"	610	18″	457	2	18″	457	31¾″	807	56"	1422	121	54.9
414-18-1-24R or L	24″	610	18″	457	1	24"	610	31¾″	807	46¾"	1188	120	54.4
414-18-1-24	24″	610	18″	457	2	24"	610	31¾″	807	68″	1727	140	63.5
414-22-1	22"	559	22"	559	0		-	29¾"	756	29½"	749	100	45.4
414-22-1-18R or L	22″	559	22"	559	1	18″	457	29¾"	756	45"	1143	115	52.2
414-22-1-18	22″	559	22"	559	2	18″	457	29¾″	756	60½"	1537	125	56.7
414-22-1-24R or L	22″	559	22"	559	1	24"	610	29¾"	756	51″	1295	127	57.6
414-22-1-24	22″	559	22″	559	2	24″	610	29¾"	756	72½″	1842	145	65.8
414-24-1	24"	610	24"	610	0		-	31¾"	807	31½"	800	135	61.2
414-24-1-18R or L	24"	610	24"	610	1	18″	457	31¾″	807	46¾"	1188	143	64.9
414-24-1-18	24″	610	24"	610	2	18″	457	31¾″	807	62″	1575	176	79.8
414-24-1-24R or L	24″	610	24"	610	1	24"	610	31¾″	807	52¾"	1340	178	80.7
414-24-1-24	24″	610	24"	610	2	24"	610	31¾″	807	74″	1880	189	85.7

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA Phone: 302-653-3000 or 800-441-8440 • Fax: 302-653-2065

www.eaglegrp.com • www.eaglemhc.com

Printed in U.S.A. ©2022 by Eagle Group

Rev. 09/22



Specification Sheet

Short Form Specifications

Eagle Two-Compartment Sink, model_______, with 2"-wide "Euro-Style" edging on front and sides. Sink bowls are heavy gauge type 304 stainless steel, with 13½" water level, deep drawn, seamless and have all corners coved. Top—including backsplash, and drainboards (when required)—is heavy gauge type 430 stainless steel. Drainboards shall be "V" creased for positive drainage. 9½" high backsplash with 1" upturn and tile edge. Legs to be 1½" 0.D. galvanized tubing with front-to-back crossbracing, and 1" high impact plastic adjustable bullet feet.



FEATURING
2"-WIDE
EURO-STYLE
EDGING

Options / Accessories

- ☐ Stainless steel legs
- ☐ Stainless steel bullet feet
- Lever drains
- ☐ Twist handle drains
- Twist drain brackets
- ☐ Faucets
- ☐ Sink covers
- ☐ Waste outlets
- ☐ Sink kits
- Overflow hole

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA Phone: 302-653-3000 • 800-441-8440 • Fax: 302-653-2065

www.eaglegrp.com www.eaglegrpnews.com www.eaglemhc.com

For custom configuration or fabrication needs, contact our **SpecFAB® Division.** Phone: 302-653-3000 • Fax: 302-653-2065 • e-mail: guotes@eaglegrp.com

Item No.:	
Project No.:	
S.I.S. No.:	

414 Series Coved Corner Two-Compartment Sinks

MODELS:

□ 414-16-2	□ 414-18-2	414-22-2	414-24-2
414-16-2-18	414-18-2-18	414-22-2-18	414-24-2-18
☐ 414-16-2-18L	☐ 414-18-2-18L	☐ 414-22-2-18L	☐ 414-24-2-18L
☐ 414-16-2-18R	☐ 414-18-2-18R	☐ 414-22-2-18R	☐ 414-24-2-18R
414-16-2-24	414-18-2-24	414-22-2-24	414-24-2-24
☐ 414-16-2-24L	☐ 414-18-2-24L	☐ 414-22-2-24L	☐ 414-24-2-24L
☐ 414-16-2-24R	☐ 414-18-2-24R	☐ 414-22-2-24R	☐ 414-24-2-24R

Materials

- Sink bowls: Heavy gauge type 304 stainless steel.
- Top: Drainboards, backsplash and euro-style edging are heavy gauge type 430 stainless steel.
- Legs: 1% (41mm)-diameter heavy-gauge galvanized tubing with plated 12-gauge gussets and high-impact corrosion resistant fully adjustable bullet feet - crossbracing is 1" (25mm)-diameter heavy-gauge galvanized tubing.

Design and Construction Features

- All bowls have deep-drawn one-piece seamless construction, using state-of-the-art hydraulic presses.
- Sink bowls have generous radius with minimum dimension of 3" (76mm) and are rectangular for maximum capacity.
- New 20" x 16" (508 x 406mm) bowl design, with enhanced polishing techniques.
- 13½" (343mm) water level is standard.
- Swirl-away drainage.
- Leg gusset assemblies welded adjacent to sink bowl for maximum weight support and stability.
- 9½" (241mm) standard backsplash includes 1" (25mm) upturn and tile edge for easy installation and feathering to wall/splash surface.
- "V" creased drainboards for positive drainage.

Mechanical:

- Water supply is ½" (13mm) IPS for hot and cold lines.
- Faucet holes are 1½" (29mm) punched on 8" (203mm) centers.
- Basket-type waste drain included fits sink bowls' 3% (89mm) opening and features 1% (38mm) outlet.

Certifications / Approvals









EG20.24 Rev. 12/22




Item No.:
Project No.:
S.I.S. No.:


414 Series Coved Corner Two-Compartment Sinks







	Overall wid	iths		-	——A—— ←—B ——
bow	l size	Dimen	sion A	3″	5" 1 1
in.	mm	in.	mm	76mm	127mm 🖟 9.5″
20" x 16"	508 x 406	27½"	699		1 241mm
24" x 18"	610 x 457	31¾"	807	1 5	
22" x 22"	559 x 559	29¾"	756	† T	
24" x 24"	610 x 610	31¾″	807	13.5 <i>"</i> 343mm	44″ 1118mm
Drain	location for	r rough	-in		39"
bow	l size	Dimen	sion B	37.5" 953mm	991mm
in.	mm	in.	mm	33311111	
20" x 16"	508 x 406	14"	357		
24" x 18"	610 x 457	16″	406	 	<u> </u>
22" x 22"	559 x 559	15″	381	9.75"	
24" x 24"	610 x 610	16″	406	248mm	」









		VL DIN		IONS igth	DRAIN	_	RD igth	OVE		DIMENS len	SIONS gth	wei	aht
model #	in.	mm	in.	mm	quantity	in.	mm	in.	mm	in.	mm	lbs.	kg
414-16-2	20″	508	16″	406	0		-	27½"	699	41″	1041	69	31.3
414-16-2-18R or L	20″	508	16″	406	1	18″	457	27½"	699	56%"	1438	127	57.6
414-16-2-18	20″	508	16″	406	2	18″	457	27½″	699	721/4"	1848	154	69.9
414-16-2-24R or L	20″	508	16″	406	1	24"	610	27½″	699	62%"	1591	156	70.8
414-16-2-24	20″	508	16″	406	2	24"	610	27½″	699	84¼"	2140	171	77.6
414-18-2	24"	610	18"	457	0		-	31¾"	807	45½"	1156	75	33.8
414-18-2-18R or L	24″	610	18″	457	1	18″	457	31¾″	807	60¾"	1543	131	59.4
414-18-2-18	24"	610	18″	457	2	18″	457	31¾″	807	76″	1930	156	70.8
414-18-2-24R or L	24″	610	18″	457	1	24"	610	31¾″	807	66¾"	1696	158	71.7
414-18-2-24	24"	610	18″	457	2	24"	610	31¾″	807	88″	2235	180	81.7
414-22-2	22″	559	22"	559	0		-	29¾"	756	53½"	1359	80	36.3
414-22-2-18R or L	22″	559	22"	559	1	18″	457	29¾"	756	69"	1753	190	86.2
414-22-2-18	22″	559	22"	559	2	18″	457	29¾"	756	84½"	2146	195	88.5
414-22-2-24R or L	22″	559	22"	559	1	24"	610	29¾″	756	75″	1905	193	87.6
414-22-2-24	22″	559	22″	559	2	24"	610	29¾″	756	96½"	2451	198	89.8
414-24-2	24"	610	24"	610	0		-	31¾"	807	57½"	1461	91	41.3
414-24-2-18R or L	24″	610	24"	610	1	18″	457	31¾″	807	72¾"	1847	192	87.1
414-24-2-18	24"	610	24"	610	2	18″	457	31¾″	807	88″	2235	204	92.5
414-24-2-24R or L	24″	610	24"	610	1	24"	610	31¾″	807	78¾"	2000	208	94.4
414-24-2-24	24″	610	24"	610	2	24"	610	31¾″	807	100″	2540	211	95.7

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA Phone: 302-653-3000 or 800-441-8440 • Fax: 302-653-2065 www.eaglegrp.com • www.eaglegrpnews.com • www.eaglemhc.com

Printed in U.S.A. ©2022 by Eagle Group

Rev. 12/22



Specification Sheet

Short Form Specifications

Eagle Three-Compartment Sink, model_______, with 2"-wide "Euro-Style" edging on front and sides. Sink bowls are heavy gauge type 304 stainless steel, with 13½" water level, deep drawn, seamless and have all corners coved. Top—including backsplash, and drainboards (when required)—is heavy gauge type 430 stainless steel. Drainboards shall be "V" creased for positive drainage. 9½" high backsplash with 1" upturn and tile edge. Legs to be 1½" 0.D. galvanized tubing with front-to-back crossbracing, and 1" high impact plastic adjustable bullet feet.



		_
Options .	/ Acce	ssories

- Stainless steel legs
- ☐ Stainless steel bullet feet
- Lever drains
- ☐ Twist handle drains
- Twist drain brackets
- Faucets
- Sink covers

2"-WIDE

EDGING

EURO-STYLE

- Waste outlets
- ☐ Sink kits
- Overflow hole

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA Phone: 302-653-3000 • 800-441-8440 • Fax: 302-653-2065

www.eaglegrp.com www.eaglegrpnews.com www.eaglemhc.com

For custom configuration or fabrication needs, contact our **SpecFAB® Division**. Phone: 302-653-3000 • Fax: 302-653-2065 • e-mail: quotes@eaglegrp.com

Item No.:	
Project No.:	
S.I.S. No.:	

414 Series Coved Corner Three-Compartment Sinks

MODELS:

414-16-3	□ 414-18-3	□ 414-22-3	414-24-3
414-16-3-18	□ 414-18-3-18	414-22-3-18	414-24-3-18
☐ 414-16-3-18L	☐ 414-18-3-18L	☐ 414-22-3-18L	☐ 414-24-3-18L
☐ 414-16-3-18R	☐ 414-18-3-18R	☐ 414-22-3-18R	☐ 414-24-3-18R
414-16-3-24	414-18-3-24	414-22-3-24	414-24-3-24
☐ 414-16-3-24L	☐ 414-18-3-24L	☐ 414-22-3-24L	☐ 414-24-3-24L
☐ 414-16-3-24R	☐ 414-18-3-24R	☐ 414-22-3-24R	☐ 414-24-3-24R

Materials

- Sink bowls: Heavy gauge type 304 stainless steel.
- Top: Drainboards, backsplash and euro-style edging are heavy gauge type 430 stainless steel.
- Legs: 1% (41mm)-diameter heavy-gauge galvanized tubing with plated 12-gauge gussets and high-impact corrosion resistant fully adjustable bullet feet - crossbracing is 1" (25mm)-diameter heavy-gauge galvanized tubing.

Design and Construction Features

- All bowls have deep-drawn one-piece seamless construction, using state-of-the-art hydraulic presses.
- Sink bowls have generous radius with minimum dimension of 3" (76mm) and are rectangular for maximum capacity.
- New 20" x 16" (508 x 406mm) bowl design, with enhanced polishing techniques.
- 13½" (343mm) water level is standard.
- Swirl-away drainage.
- Leg gusset assemblies welded adjacent to sink bowl for maximum weight support and stability.
- 9½" (241mm) standard backsplash includes 1" (25mm) upturn and tile edge for easy installation and feathering to wall/splash surface.
- "V" creased drainboards for positive drainage.

Mechanical:

- Water supply is $\frac{1}{2}$ (13mm) IPS for hot and cold lines.
- Faucet holes are 1½" (29mm) punched on 8" (203mm) centers; two sets of faucet holes are punched where indicated on chart (back page).
- Basket-type waste drain included fits sink bowls'
 3½" (89mm) opening and features 1½" (38mm) outlet.

Certifications / Approvals









EG20.25 Rev. 09/22




Item No.:	_
Project No.:	_
S.I.S. No.:	_


414 Series Coved Corner Three-Compartment Sinks







	Overall wid	dths		4	—A—— — B —
	l size		sion A	3″	5"1 1 1
in.	mm	in.	mm	76mm	127 <u>mm ↓ </u>
20" x 16"	508 x 406	27½"	699		241mm
24" x 18"	610 x 457	31¾"	807	1	
22" x 22"	559 x 559	29¾"	756	1 t 📙	
24" x 24"	610 x 610	31¾″	807	13.5 " 343mm	44″ 1118mm
Drain	location fo	r rough	-in	37.5"	39"
bow	l size	Dimen	sion B	953mm	991mm
in.	mm	in.	mm		'
20" x 16"	508 x 406	14"	357		
24" x 18"	610 x 457	16″	406	│ 	
22" x 22"	559 x 559	15″	381	9.75″	
24" x 24"	610 x 610	16″	406	248mm	









	BOV wid		_	IONS igth	DRAIN	AINBOARD length			RALL I	DIMENS leng		weight	
model #	in.	mm	in.	mm	quantity	in.	mm	in.	mm	in.	mm	lbs.	kg
414-16-3	20″	508	16″	406	0		-	27½"	699	58¾"	1492	165	74.8
414-16-3-18R or L	20"	508	16″	406	1	18″	457	27½″	699	74%"	1889	170	77.1
414-16-3-18	20″	508	16″	406	2	18″	457	27½"	699	90″	2286	175	79.4
414-16-3-24R or L	20"	508	16″	406	1	24"	610	27½"	699	80%"	2042	190	86.2
414-16-3-24	20″	508	16″	406	2	24"	610	27½″	699	102″	2591	204	92.5
414-18-3*	24"	610	18″	457	0		-	31¾"	807	65½"	1664	167	75.8
414-18-3-18R or L*	24"	610	18″	457	1	18″	457	31¾″	807	80¾"	2051	206	93.4
414-18-3-18*	24"	610	18″	457	2	18″	457	31¾"	807	96″	2438	224	101.6
414-18-3-24R or L*	24"	610	18″	457	1	24"	610	31¾″	807	86¾"	2203	228	103.4
414-18-3-24*	24"	610	18″	457	2	24"	610	31¾″	807	108″	2743	232	105.2
414-22-3*	22"	559	22"	559	0		-	29¾″	756	77½″	1969	170	77.1
414-22-3-18R or L*	22"	559	22"	559	1	18″	457	29¾"	756	93″	2362	224	101.6
414-22-3-18*	22″	559	22"	559	2	18″	457	29¾"	756	108½"	2756	231	104.8
414-22-3-24R or L*	22"	559	22"	559	1	24"	610	29¾"	756	99″	2515	235	106.6
414-22-3-24*	22″	559	22"	559	2	24"	610	29¾″	756	120½"	3061	239	108.4
414-24-3*	24"	610	24"	610	0		-	31¾″	807	83½"	2121	175	79.4
414-24-3-18R or L*	24"	610	24"	610	1	18″	457	31¾″	807	98¾"	2508	226	102.5
414-24-3-18*	24"	610	24"	610	2	18″	457	31¾″	807	114″	2896	249	113.0
414-24-3-24R or L*	24"	610	24"	610	1	24"	610	31¾″	807	104¾"	2661	250	113.4
414-24-3-24*	24″	610	24″	610	2	24″	610	31¾″	807	126″	3200	260	117.9

^{*} Features two sets of faucet holes.

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA Phone: 302-653-3000 or 800-441-8440 • Fax: 302-653-2065 www.eaglegrp.com • www.eaglegrpnews.com • www.eaglemhc.com

Printed in U.S.A. ©2022 by Eagle Group

Rev. 09/22



Specification Sheet

Short Form Specifications

Eagle Four-Compartment Sink, model_______, with 2"-wide "Euro-Style" edging on front and sides. Sink bowls are heavy gauge type 304 stainless steel, with 13½" water level, deep drawn, seamless and have all corners coved. Top—including backsplash, and drainboards (when required)—is heavy gauge type 430 stainless steel. Drainboards shall be "V" creased for positive drainage. 9½" high backsplash with 1" upturn and tile edge. Legs to be 1½" 0.D. galvanized tubing with front-to-back crossbracing, and 1" high impact plastic adjustable bullet feet.





Options / Accessories


- ☐ Stainless steel legs
- ☐ Stainless steel bullet feet☐ Lever drains
- ☐ Twist handle drains
- I Wist Haritie trains
- Twist drain brackets
- ☐ Faucets
- Sink covers
- ☐ Waste outlets
- ☐ Sink kits
- □ Overflow hole

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA Phone: 302-653-3000 • 800-441-8440 • Fax: 302-653-2065

www.eaglegrp.com www.eaglegrpnews.com www.eaglemhc.com

For custom configuration or fabrication needs, contact our **SpecFAB® Division**. Phone: 302-653-3000 • Fax: 302-653-2065 • e-mail: quotes@eaglegrp.com



414 Series Coved Corner Four-Compartment Sinks

MODELS:

414-16-4	414-18-4	414-24-4
□ 414-16-4-18	□ 414-18-4-18	□ 414-24-4-18
☐ 414-16-4-18L	☐ 414-18-4-18L	☐ 414-24-4-18L
☐ 414-16-4-18R	☐ 414-18-4-18R	☐ 414-24-4-18R
□ 414-16-4-24	414-18-4-24	414-24-4-24
☐ 414-16-4-24L	☐ 414-18-4-24L	☐ 414-24-4-24L
☐ 414-16-4-24R	□ 414-18-4-24R	□ 414-24-4-24R

Materials

- Sink bowls: Heavy gauge type 304 stainless steel.
- Top: Drainboards, backsplash and euro-style edging are heavy gauge type 430 stainless steel.
- Legs: 1%" (41mm)-diameter heavy-gauge galvanized tubing with plated 12-gauge gussets and high-impact corrosion resistant fully adjustable bullet feet - crossbracing is 1" (25mm)-diameter heavy-gauge galvanized tubing.

Design and Construction Features

- All bowls have deep-drawn one-piece seamless construction, using state-of-the-art hydraulic presses.
- Sink bowls have generous radius with minimum dimension of 3" (76mm) and are rectangular for maximum capacity.
- New 20" x 16" (508 x 406mm) bowl design, with enhanced polishing techniques.
- 13½" (343mm) water level is standard.
- Swirl-away drainage.
- Leg gusset assemblies welded adjacent to sink bowl for maximum weight support and stability.
- 9½" (241mm) standard backsplash includes 1" (25mm) upturn and tile edge for easy installation and feathering to wall/splash surface.
- "V" creased drainboards for positive drainage.

Mechanical:

- Water supply is $\frac{1}{2}$ (13mm) IPS for hot and cold lines.
- Faucet holes are 1½" (29mm) punched on 8" (203mm) centers; two sets of faucet holes are punched.
- Basket-type waste drain included fits sink bowls'
 3½" (89mm) opening and features 1½" (38mm) outlet.

Certifications / Approvals








EG20.26 Rev. 12/22





Item No.:	
Project No.:	
S.I.S. No.:	


414 Series Coved Corner Four-Compartment Sinks







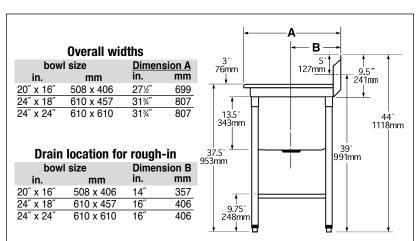









	BOWL DIMENSIONS width length			DRAIN	OVERALL DIMENSIONS width length					weight			
model #	in.	mm	in.	mm	quantity	in.	igth mm	in. mm		in.	mm	lbs.	kg
					quantity	111.	1111111						
414-16-4	20″	508	16″	406	0		•	27½"	699	76½"	1943	180	81.7
414-16-4-18R or L	20″	508	16″	406	1	18″	457	27½"	699	921/8"	2340	195	88.5
414-16-4-18	20″	508	16″	406	2	18″	457	27½″	699	107¾"	2737	231	104.8
414-16-4-24R or L	20″	508	16″	406	1	24"	610	27½"	699	981/8"	2492	235	106.6
414-16-4-24	20″	508	16″	406	2	24"	610	27½″	699	119¾"	3042	238	108.0
414-18-4	24"	610	18″	457	0		•	31¾″	807	85½"	2172	218	98.9
414-18-4-18R or L	24"	610	18″	457	1	18″	457	31¾″	807	100¾"	2559	225	102.1
414-18-4-18	24"	610	18″	457	2	18″	457	31¾"	807	116″	2946	247	112.0
414-18-4-24R or L	24"	610	18″	457	1	24"	610	31¾″	807	106¾"	2711	254	115.2
414-18-4-24	24"	610	18″	457	2	24"	610	31¾″	807	128"	3251	262	118.8
414-24-4	24"	610	24"	610	0		-	31¾″	807	109½"	2783	231	104.8
414-24-4-18R or L	24"	610	24"	610	1	18″	457	31¾"	807	124¾"	3169	248	112.5
414-24-4-18	24"	610	24"	610	2	18″	457	31¾″	807	140"	3556	263	119.3
414-24-4-24R or L	24"	610	24"	610	1	24"	610	31¾″	807	130¾"	3321	278	126.1
414-24-4-24	24"	610	24"	610	2	24"	610	31¾″	807	152″	3861	293	132.9

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA Phone: 302-653-3000 or 800-441-8440 • Fax: 302-653-2065 www.eaglegrp.com • www.eaglegrpnews.com • www.eaglemhc.com

Printed in U.S.A. ©2022 by Eagle Group

Rev. 12/22