

Specification Sheet

Short Form Specifications

Eagle One-Compartment Utility Sinks, model
______. Constructed of type 304 or 430 stainless steel with square corners, Euro-Style edging on front, and 8" backsplash. All partitions have \%" rolled top edge. Faucet holes punched on 8" centers. All outside corners to be bullnosed for clean, safe edges. 1\%" 0.D. galvanized tubular legs with adjustable bullet feet.



one-compartment utility sink

•		_	
Options	1	Arrecen	riec

☐ Faucets	Lever waste with overflow
■ Detachable drainboard *	Stainless steel legs
☐ Lever waste	Stainless steel feet

Design and Construction Features:

- For numerous applications when NSF approval is not required (For NSF-approved utility sinks, add prefix "N-" to model number. Example: N-2424-1-16/3)
- Entire assembly is fuse welded and planished, providing a one-piece seamless sink unit.
- 34½" to 35½" (876 to 902mm) working height.

Item No.: ______ Project No.: _____ S.I.S. No.: ____

One-Compartment Utility Sinks with Square Corner Construction

MODELS:

□ 1818-1-16/4	□ 2136-1-16/3
□ 1818-1-16/3	2424-1-16/4
1824-1-16/4	2424-1-16/3
1824-1-16/3	2436-1-16/4
2118-1-16/4	2436-1-16/3
2118-1-16/3	2124-1-18-16/4
2124-1-16/4	2124-1-18-16/3
2124-1-16/3	2424-1-24-16/4
☐ 2136-1-16/A	□ 2/2/1-2/-16/3

Top:

- · All partitions have euro-style front edge.
- Available with detachable* or welded drainboards.
- 8" (203mm) splash features 2" (51mm) return to wall on 45° angle, with 1" (25mm) upturn.
- 11/8" (29mm) faucet holes punched on 8" (203mm) centers.

Legs:

- 1%" (41mm)-diameter heavy-gauge galvanized tubing.
- High-impact corrosion-resistant 1" (25mm) adjustable bullet feet.
- Leg locations fall directly under sink bowl, providing increased stability and maximum weight support.

Sink Bowl:

- 16 gauge type 304 or 430 stainless steel.
- 13%" (340mm)-deep compartment.
- 12-gauge leg gussets welded to a die-cut heavy-gauge reinforcing plate underneath sink bowl.
- Drain hole is 3½" (89mm)-diameter, recessed, and complete with 1½" (38mm) IPS basket-type waste drain, which is shipped loose.

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA Phone: 302-653-3000 • 800-441-8440 • Fax: 302-653-2065 www.eaglegrp.com www.eaglemhc.com

For custom configuration or fabrication needs, contact our **SpecFAB® Division**. Phone: 302-653-3000 • Fax: 302-653-2065 • e-mail: quotes@eaglegrp.com




EG20.13A Rev. 06/24

^{*} See Spec Sheet #EG20.13E for optional detachable drainboards.



Item No.:	
Project No.:	
S.I.S. No.:	


One-Compartment Utility Sinks with Square Corner Construction

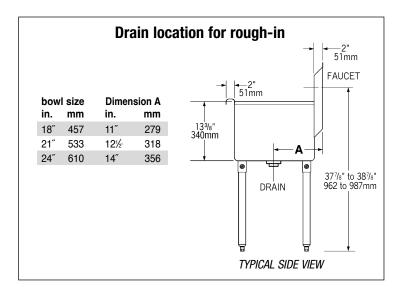



Sinks with No Drainboards

16 gauge type 430	16 gauge type 304	BO	WL DI	MENSI	ONS	DRAIN	OVE	RALLI					
stainless steel	stainless steel	wic	lth	length		length		width		length		weight	
model #	model #	in.	mm	in.	mm	quantity	in. mm	in.	mm	in.	mm	lbs.	kg
1818-1-16/4	1818-1-16/3	18″	457	18″	457	0	n/a	22″	559	19%"	492	53	24.0
1824-1-16/4	1824-1-16/3	18″	457	24"	610	0	n/a	22″	559	25%"	645	56	25.4
2118-1-16/4	2118-1-16/3	21″	533	18″	457	0	n/a	25″	635	19%"	492	56	25.4
2124-1-16/4	2124-1-16/3	21″	533	24"	610	0	n/a	25"	635	25%"	645	61	27.7
2136-1-16/4	2136-1-16/3	21″	533	36″	914	0	n/a	25″	635	37%"	949	66	29.9
2424-1-16/4	2424-1-16/3	24"	610	24"	610	0	n/a	28″	711	25%"	645	60	27.2
2436-1-16/4	2436-1-16/3	24"	610	36″	914	0	n/a	28″	711	37%"	949	68	30.8



Sinks with Double Drainboards

16 gauge type 430	16 gauge type 304	BC	WL DI	DRAIN	IBOA	RD	 OVERALL DIMENSIONS 							
stainless steel	stainless steel	wi	dth	len	gth		len	igth	wi	dth	len	gth	wei	ght
model #	model #	in.	mm	in.	mm	quantity	in.	mm	in.	mm	in.	mm	lbs.	kg
2124-1-18-16/4	2124-1-18-16/3	21″	533	24"	610	2	18″	457	25″	635	60¼"	1530	99	44.9
2424-1-24-16/4	2424-1-24-16/3	24"	610	24"	610	2	24"	610	28″	711	72¼"	1835	108	49.0

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA Phone: 302-653-3000 or 800-441-8440 • Fax: 302-653-2065

www.eaglegrp.com • www.eaglemhc.com

Printed in U.S.A. ©2024 by Eagle Group

Rev. 06/24



Specification Sheet

Short Form Specifications

Eagle Two-Compartment Utility Sinks, model
______. Constructed of type 304 or 430 stainless steel with square corners, Euro-Style edging on front, and 8" backsplash. All partitions have 5" rolled top edge. Faucet holes punched on 8" centers. All outside corners to be bullnosed for clean, safe edges. 15" 0.D. galvanized tubular legs with adjustable bullet feet.



two-compartment utility sink

Options / Accessories

☐ Faucets	Lever waste with overflow
□ Detachable drainboard *	Stainless steel legs
☐ Lever waste	Stainless steel feet

Design and Construction Features:

- For numerous applications when NSF approval is not required (For NSF-approved utility sinks, add prefix "N-" to model number. Example: N-2460-2-16/3)
- Entire assembly is fuse welded and planished, providing a one-piece seamless sink unit.
- 34½" to 35½" (876 to 902mm) working height.

Item No.: ______ Project No.: _____ S.I.S. No.: _____

Two-Compartment Utility Sinks with Square Corner Construction

MODELS:

□ 1836-2-16/4	2448-2-16/4
□ 1836-2-16/3	2448-2-16/3
□ 1848-2-16/4	□ 2460-2-16/4
□ 1848-2-16/3	□ 2460-2-16/3
□ 2136-2-16/4	□ 2136-2-18-16/4
□ 2136-2-16/3	2136-2-18-16/3
□ 2148-2-16/4	2448-2-24-16/4
☐ <i>2148-2-16/3</i>	☐ 2448-2-24-16/3

Top:

- All partitions have euro-style front edge.
- Available with detachable* or welded drainboards.
- 8" (203mm) splash features 2" (51mm) return to wall on 45° angle, with 1" (25mm) upturn.
- 1½" (29mm) faucet holes punched on 8" (203mm) centers.

Legs:

- 1%" (41mm)-diameter heavy-gauge galvanized tubing.
- High-impact corrosion-resistant 1" (25mm) adjustable bullet feet.
- Leg locations fall directly under sink bowls, providing increased stability and maximum weight support.

Sink Bowls:

- 16 gauge type 304 or 430 stainless steel.
- 13%" (340mm)-deep compartments.
- 12-gauge leg gussets welded to a die-cut heavy-gauge reinforcing plate underneath sink bowls.
- Drain holes are 3½" (89mm)-diameter, recessed, and complete with 1½" (38mm) IPS basket-type waste drain, which is shipped loose.

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA Phone: 302-653-3000 • 800-441-8440 • Fax: 302-653-2065 www.eaglegrp.com www.eaglemhc.com

For custom configuration or fabrication needs, contact our **SpecFAB® Division**. Phone: 302-653-3000 • Fax: 302-653-2065 • e-mail: quotes@eaglegrp.com






EG20.13B Rev. 06/24


^{*} See Spec Sheet #EG20.13E for optional detachable drainboards.



Item No.:	
Project No.: .	
S.I.S. No.:	


Two-Compartment Utility Sinks with Square Corner Construction

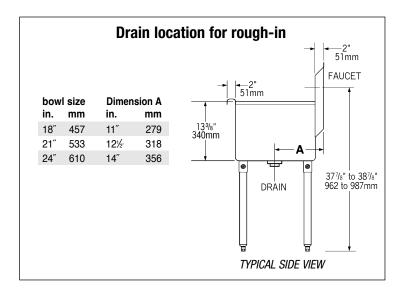



Sinks with No Drainboards

16 gauge type 430	16 gauge type 304	BO	WL DI	MENS	IONS	DRAIN	OVERALL DIMENSIONS						
stainless steel	stainless steel	wic	width		gth		length		dth	length			ight
model #	model #	in.	mm	in.	mm	quantity	in. mm	in.	mm	in.	mm	lbs.	kg
1836-2-16/4	1836-2-16/3	18″	457	18″	457	0	n/a	22"	559	37%"	991	75	34.0
1848-2-16/4	1848-2-16/3	18″	457	24"	610	0	n/a	22"	559	49%"	1295	80	36.3
2136-2-16/4	2136-2-16/3	21"	533	18″	457	0	n/a	25"	635	37%"	991	80	36.3
2148-2-16/4	2148-2-16/3	21″	533	24"	610	0	n/a	25"	635	49%"	1295	85	38.6
2448-2-16/4	2448-2-16/3	24"	610	24"	610	0	n/a	28″	711	49%"	1295	89	40.4
2460-2-16/4	2460-2-16/3	24"	610	30"	762	0	n/a	28″	711	61%"	1600	95	43.1



Sinks with Double Drainboards

16 gauge type 430	16 gauge type 304	ΙВ	BOWL DIMENSIONS				DRAIN	IBOAI	RD	OVERALL DIMENSIONS				1	
stainless steel	stainless steel	١ ا	width	h	len	gth		len	igth	wi	dth	len	gth	wei	ight
model #	model #	in	ı. I	mm	in.	mm	quantity	in.	mm	in.	mm	in.	mm	lbs.	kg
2136-2-18-16/4	2136-2-18-16/3	21	1″	533	18″	457	2	18″	457	25"	635	721/4"	1905	120	54.4
2448-2-24-16/4	2448-2-24-16/3	24	1″	610	24″	610	2	24″	610	28″	711	96¼"	2515	139	63.1

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA Phone: 302-653-3000 or 800-441-8440 • Fax: 302-653-2065

www.eaglegrp.com • www.eaglemhc.com

Printed in U.S.A. ©2024 by Eagle Group

Rev. 06/24



Specification Sheet

Short Form Specifications

Eagle Three-Compartment Utility Sinks, model ______. Constructed of type 304 or 430 stainless steel with square corners, Euro-Style edging on front, and 8" backsplash. All partitions have \%" rolled top edge. Faucet holes punched on 8" centers. All outside corners to be bullnosed for clean, safe edges. 1\%" 0.D. galvanized tubular legs with adjustable bullet feet.



three-compartment utility sink

Options / Accessories

☐ Faucets	Lever waste with overflow
■ Detachable drainboard *	Stainless steel legs
☐ Lever waste	☐ Stainless steel feet

Design and Construction Features:

- For numerous applications when NSF approval is not required (For NSF-approved utility sinks, add prefix "N-" to model number. Example: N-2460-3-16/3)
- Entire assembly is fuse welded and planished, providing a one-piece seamless sink unit.
- 34½" to 35½" (876 to 902mm) working height.

Item No.: ______ Project No.: _____ S.I.S. No.: _____

Three-Compartment Utility Sinks with Square Corner Construction

MODELS:

□ 1836-3-16/4	2136-3-16/3	2448-3-16/4	2136-3-18-16/3
1836-3-16/3	2148-3-16/4	2448-3-16/3	2148-3-18-16/4
1848-3-16/4	2148-3-16/3	2460-3-16/4	2148-3-18-16/3
1848-3-16/3	2154-3-16/4	2460-3-16/3	2154-3-18-16/4
1854-3-16/4	2154-3-16/3	2472-3-16/4	2154-3-18-16/3
1854-3-16/3	2160-3-16/4	2472-3-16/3	2472-3-24-16/4
2136-3-16/4	2160-3-16/3	2136-3-18-16/4	2472-3-24-16/3

Top:

- All partitions have euro-style front edge.
- Available with detachable* or welded drainboards.
- 8" (203mm) splash features 2" (51mm) return to wall on 45° angle, with 1" (25mm) upturn.
- 1½" (29mm) faucet holes punched on 8" (203mm) centers.

Legs:

- 1%" (41mm)-diameter heavy-gauge galvanized tubing.
- High-impact corrosion-resistant 1" (25mm) adjustable bullet feet.
- Leg locations fall directly under sink bowls, providing increased stability and maximum weight support.

Sink Bowls:

- 16 gauge type 304 or 430 stainless steel.
- 13%" (340mm)-deep compartments.
- 12-gauge leg gussets welded to a die-cut heavy-gauge reinforcing plate underneath sink bowls.
- Drain holes are 3½" (89mm)-diameter recessed and complete with 1½" (38mm) IPS basket-type waste drain, which is shipped loose.

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA Phone: 302-653-3000 • 800-441-8440 • Fax: 302-653-2065 www.eaglegrp.com

www.eaglemhc.com

For custom configuration or fabrication needs, contact our **SpecFAB® Division**. Phone: $302-653-3000 \bullet Fax: 302-653-2065 \bullet e-mail: quotes@eaglegrp.com$







EG20.13C Rev. 06/24

 $^{^{\}star}$ See Spec Sheet # EG20.13E for optional detachable drainboards.



Three-Compartment Utility Sinks with Square Corner Construction

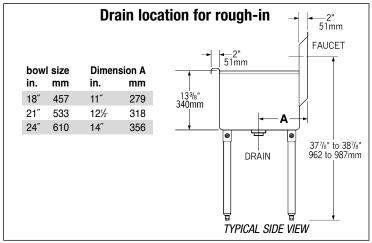




Sinks with No Drainboards

16 gauge type 430 stainless steel	16 gauge type 304 stainless steel	BOWL DIMENSIONS width length		DRAIN	OVEF		weight						
model #	model #	in.	mm	in.	mm	quantity	length in. mm	in.	mm	in.	gth mm	lbs.	kg
1836-3-16/4	1836-3-16/3	18″	457	12″	305	0	n/a	22"	559	37%"	949	79	35.8
1848-3-16/4	1848-3-16/3	18″	457	16″	406	0	n/a	22"	559	49%"	1254	90	40.8
1854-3-16/4	1854-3-16/3	18″	457	18″	457	0	n/a	22"	559	55%"	1406	97	44.0
2136-3-16/4	2136-3-16/3	21″	533	12″	305	0	n/a	25"	635	37%"	949	85	38.6
2148-3-16/4	2148-3-16/3	21″	533	16″	406	0	n/a	25″	635	49%"	1254	87	39.5
2154-3-16/4	2154-3-16/3	21″	533	18″	457	0	n/a	25"	635	55%"	1406	100	45.4
2160-3-16/4*	2160-3-16/3*	21″	533	20″	508	0	n/a	25″	635	61%"	1559	110	49.9
2448-3-16/4	2448-3-16/3	24"	610	16″	406	0	n/a	28″	711	49%"	1254	92	41.7
2460-3-16/4*	2460-3-16/3*	24″	610	20"	508	0	n/a	28″	711	61%"	1559	115	52.2
2472-3-16/4*	2472-3-16/3*	24"	610	24"	610	0	n/a	28″	711	73%"	1864	125	56.7

^{*} Includes two sets of faucet holes.



Sinks with Double Drainboards

16 gauge type 430	16 gauge type 304	BOWL DIMENSIONS			ONS	DRAIN	 OVERALL DIMENSIONS				1			
stainless steel	stainless steel	wic	width		gth	length		width		length		we	ight	
model #	model #	in.	mm	in.	mm	quantity	in.	mm	in.	mm	in.	mm	lbs.	kg
2136-3-18-16/4	2136-3-18-16/3	21″	533	12"	305	2	18″	457	25″	635	72¼"	1835	125	56.7
2148-3-18-16/4	2148-3-18-16/3	21″	533	16″	406	2	18″	457	25"	635	84¼"	2140	127	57.6
2154-3-18-16/4	2154-3-18-16/3	21″	533	18″	457	2	18″	457	25″	635	90¼"	2292	140	63.5
2472-3-24-16/4*	2472-3-24-16/3*	24"	610	24"	610	2	24"	610	28″	711	1201//"	3054	175	79.4

^{*} Includes two sets of faucet holes.

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA Phone: 302-653-3000 or 800-441-8440 • Fax: 302-653-2065 www.eaglegrp.com • www.eaglemhc.com

©2024 by Eagle Group

Rev. 06/24

Printed in U.S.A.



Specification Sheet

Short Form Specifications

Eagle Four-Compartment Utility Sinks, model
_______. Constructed of type 304 or 430 stainless
steel with square corners, Euro-Style edging on front, and
8" backsplash. All partitions have %" rolled top edge. Faucet
holes punched on 8" centers (set of two). All outside corners
to be bullnosed for clean, safe edges. 1%" 0.D. galvanized
tubular legs with adjustable bullet feet.



four-compartment utility sink

Options / Accessories

☐ Faucets	Lever waste with overflow
Detachable drainboard *	Stainless steel legs
■ Lever waste	Stainless steel feet

Design and Construction Features:

- For numerous applications when NSF approval is not required (For NSF-approved utility sinks, add prefix "N-" to model number. Example: N-2460-2-16/3)
- Entire assembly is fuse welded and planished, providing a one-piece seamless sink unit.
- 34½" to 35½" (876 to 902mm) working height.

Item No.: ______ Project No.: _____ S.I.S. No.: ____

Four-Compartment Utility Sinks with Square Corner Construction

MODELS:

- ☐ 1872-4-16/4
- □ 1872-4-16/3
- **□** 2172-4-16/4
- **□** 2172-4-16/3
- **□** 2472-4-16/4
- **2472-4-16/3**
- **□** 2172-4-18-16/4
- **2172-4-18-16/3**

Top:

- All partitions have euro-style front edge.
- Available with detachable* or welded drainboards.
- 8" (203mm) splash features 2" (51mm) return to wall on 45° angle, with 1" (25mm) upturn.
- Set of two 1%" (29mm) faucet holes punched on 8" (203mm) centers.

Legs:

- 1%" (41mm)-diameter heavy-gauge galvanized tubing.
- High-impact corrosion-resistant 1" (25mm) adjustable bullet feet.
- Leg locations fall directly under sink bowls, providing increased stability and maximum weight support.

Sink Bowls:

- 16 gauge type 304 or 430 stainless steel.
- 13%" (340mm)-deep compartments.
- 12-gauge leg gussets welded to a die-cut heavy-gauge reinforcing plate underneath sink bowls.
- Drain holes are 3½" (89mm)-diameter, recessed, and complete with 1½" (38mm) IPS basket-type waste drain, which is shipped loose.

EAGLE GROUP

www.eaglemhc.com

100 Industrial Boulevard, Clayton, DE 19938-8903 USA Phone: 302-653-3000 • 800-441-8440 • Fax: 302-653-2065 www.eaglegrp.com

For custom configuration or fabrication needs, contact our **SpecFAB® Division.** Phone: 302-653-3000 • Fax: 302-653-2065 • e-mail: guotes@eaglegrp.com






EG20.13D Rev. 06/24


 $^{^{\}star}$ See Spec Sheet # EG20.13E for optional detachable drainboards.



Item No.:	
Project No.:	
S.I.S. No.:	


Four-Compartment Utility Sinks with Square Corner Construction

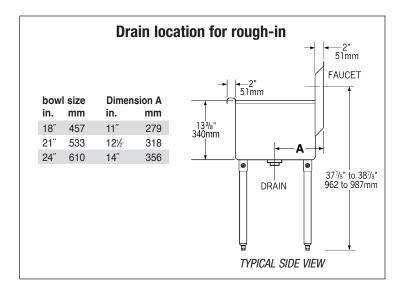



Sinks with No Drainboards

16 gauge type 430 stainless steel	16 gauge type 304 stainless steel	BOWL DIMENSIONS width length		DRAIN	OVERALL DIMENSIONS width length				weight				
model #	model #	in.	mm	in.	mm	quantity	length in. mm	in.	mm	in.	mm	lbs.	kg
1872-4-16/4	1872-4-16/3	18″	457	18″	457	0	n/a	22"	559	73%"	1864	110	49.9
2172-4-16/4	2172-4-16/3	21″	533	18″	457	0	n/a	25″	635	73%"	1864	115	52.2
2472-4-16/4	2472-4-16/3	24"	610	18″	457	0	n/a	28″	711	73%"	1864	125	56.7



Sinks with Double Drainboards

16 gauge type 430	6 gauge type 430 16 gauge type 304		WL DI	MENSI	ONS	DRAIN	 OVERALL DIMENSIONS							
stainless steel	stainless steel	width		length			length		width		length		wei	ight
model #	model #	in.	mm	in.	mm	quantity	in.	mm	in.	mm	in.	mm	lbs.	kg
2172-4-18-16/4	2172-4-18-16/3	21″	533	18″	457	2	18″	457	25″	635	1081/4"	2750	155	70.3

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA Phone: 302-653-3000 or 800-441-8440 • Fax: 302-653-2065

www.eaglegrp.com • www.eaglemhc.com

Printed in U.S.A. ©2024 by Eagle Group

Rev. 06/24