




Profit from the Eagle Advantage®

Specification Sheet

Short Form Specifications

Eagle Cantilever Shelving System to consist of 14 gauge regular or NSF continuously seam-welded uprights, ceiling brackets, and single- or double-knob brackets. For use with either wire or solid shelving (sold separately). Ceiling brackets and knob brackets available in stainless steel and aluminum finish. Foot brackets, used for island applications, in stainless steel finish.

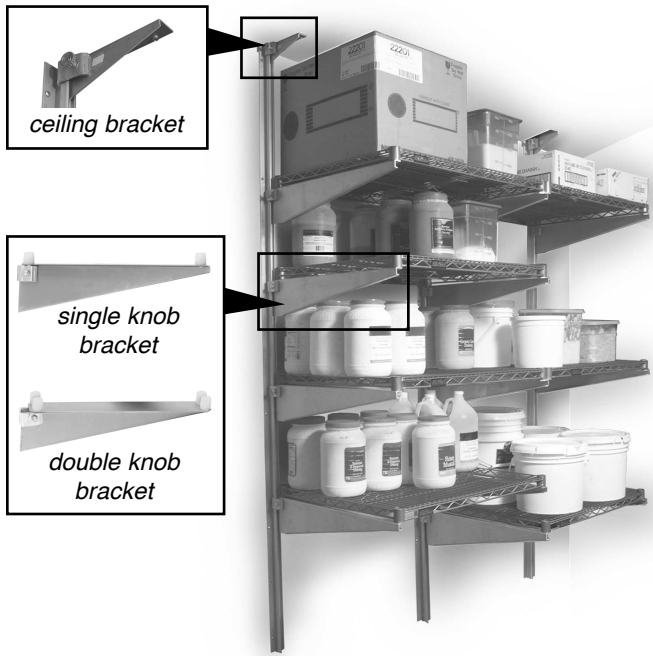

wall-mounted cantilevered shelving shown with wire shelving

Item No.: _____
 Project No.: _____
 S.I.S. No.: _____

Cantilevered Shelving System — Brackets

- MODELS:**
- MMCB-6-** *MMBSS-K-** *MMDB-K/A-**
 - MMNSCB-6-** *MMNSBSS-K-** *MMNSDB-K/A-**
 - MMCBSS-6-** *MMB-K/A-** *MMFBSSK-**
 - MMNSCBSS-6-** *MMNSB-K/A-** *MMNSFBSSK-**
 - MMCB/A6-** *MMDBSS-K-** *MMDFBSSK-**
 - MMNSCB/A6-** *MMNSDBSS-K-** *MMNSDFBSSK-**

* See charts for complete model numbers.

- Designed with convenience in mind.
- Requires no post supports to get in the way, making shelf loading and unloading easier.
- For use with both wire and solid shelving.
- 100% usable shelving surface, from section to section, wall to wall, and front to back — no posts to restrict stock placement.
- Infinite height adjustability — no slots or keyholes to line up for leveling, and shimming is eliminated.
- Wall-mounted shelving requires no support from the floor — floor area is therefore open and easily maintained.
- Finishes available include stainless steel and aluminum.
- Regular and NSF-approved components available.
- All components are made of heavy gauge material.
- Heavy-duty, rugged construction.

See Spec Sheet #EG01.45A for Uprights.
 See Spec Sheet #EG01.45C for Heavy Duty Components.

CEILING BRACKETS

Required for all installations.

description	STAINLESS STEEL		ALUMINUM	
	REGULAR model #	NSF model #	REGULAR model #	NSF model #
left *	<i>MMCBSS-6-L</i>	<i>MMNSCBSS-6-L</i>	<i>MMCB/A6-L</i>	<i>MMNSCB/A6-L</i>
right *	<i>MMCBSS-6-R</i>	<i>MMNSCBSS-6-R</i>	<i>MMCB/A6-R</i>	<i>MMNSCB/A6-R</i>

* In a run of shelving, left or right brackets can be used as "center" brackets.

NOTE: No wall backing is required if using ceiling mounted brackets in an aluminum walk-in cooler.

EAGLE GROUP
 100 Industrial Boulevard, Clayton, DE 19938-8903 USA
 Phone: 302-653-3000 • 800-441-8440 • Fax: 302-653-2065
www.eaglegrp.com
www.eaglegrpnews.com
www.eaglemhc.com



For custom configuration or fabrication needs, contact our **SpecFAB® Division**.
 Phone: 302-653-3000 • Fax: 302-653-2065 • e-mail: quotes@eaglegrp.com

EG01.45B Rev. 09/23

Spec sheets available for viewing, printing or downloading from our online literature library at our websites



Profit from the Eagle Advantage®

Item No.: _____
 Project No.: _____
 S.I.S. No.: _____

KNOB BRACKETS

Single Knob Brackets

For use with wire or solid shelving. Available with flanges at top left or right. To order, add suffix “-L” (left bracket) or “-R” (right bracket) to model number. Example: MMB-K-21-L

height in. mm	STAINLESS STEEL			ALUMINUM		
	REGULAR model #	NSF model #	weight lb. kg	REGULAR model #	NSF model #	weight lb. kg
14" 356	MMBSS-K-14	MMNSBSS-K-14	2 0.9	MMB-K/A-14	MMNSB-K/A-14	1 0.5
18" 457	MMBSS-K-18	MMNSBSS-K-18	2 0.9	MMB-K/A-18	MMNSB-K/A-18	1 0.5
21" 533	MMBSS-K-21	MMNSBSS-K-21	3 1.4	MMB-K/A-21	MMNSB-K/A-21	1 0.5
24" 610	MMBSS-K-24	MMNSBSS-K-24	3 1.4	MMB-K/A-24	MMNSB-K/A-24	2 0.9

WEIGHT CAPACITY PER BRACKET			
Pertains to all brackets listed on this page.			
bracket length in. mm	maximum load recommended		
	lb.	kg	
14" 356	540	244.9	
18" 457	465	210.9	
21" 533	395	179.2	
24" 610	360	163.3	

Double Knob Brackets

For use with wire or solid shelving. With flanges on top left and right, these brackets support two adjoining shelves on a common upright.

height in. mm	STAINLESS STEEL			ALUMINUM		
	REGULAR model #	NSF model #	weight lb. kg	REGULAR model #	NSF model #	weight lb. kg
14" 356	MMDBSS-K-14	MMNSDBSS-K-14	3 1.4	MMDB-K/A-14	MMNSDB-K/A-14	1 0.5
18" 457	MMDBSS-K-18	MMNSDBSS-K-18	3 1.4	MMDB-K/A-18	MMNSDB-K/A-18	2 0.9
21" 533	MMDBSS-K-21	MMNSDBSS-K-21	4 1.8	MMDB-K/A-21	MMNSDB-K/A-21	2 0.9
24" 610	MMDBSS-K-24	MMNSDBSS-K-24	4 1.8	MMDB-K/A-24	MMNSDB-K/A-24	2 0.9

FOOT BRACKETS WITH KNOBS

Used for island application.

Single Foot Brackets with Knobs

For use with wire or solid shelving. Serves as a base for bottom shelf. Available with left or right top flanges. To order, add suffix “-L” (left bracket) or “-R” (right bracket) to model number. Example: MMFB-K-14-R

height in. mm	STAINLESS STEEL		
	REGULAR model #	NSF model #	weight lb. kg
14" 356	MMFBSSK-149	MMNSFBSSK-149	4 1.8
18" 457	MMFBSSK-189	MMNSFBSSK-189	6 2.7
24" 610	MMFBSSK-249	MMNSFBSSK-249	7 3.2



single foot bracket

Double Foot Brackets with Knobs

For use with wire or solid shelving. Serves as a base for two adjoining bottom shelves.

height in. mm	STAINLESS STEEL		
	REGULAR model #	NSF model #	weight lb. kg
14" 356	MMDFBSSK-149	MMNSDFBSSK-149	5 2.3
18" 457	MMDFBSSK-189	MMNSDFBSSK-189	7 3.2
24" 610	MMDFBSSK-249	MMNSDFBSSK-249	8 3.6



double foot bracket

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA

Phone: 302-653-3000 or 800-441-8440 • Fax: 302-653-2065

www.eaglegrp.com • www.eaglegrpnews.com • www.eaglehmc.com

Printed in U.S.A.
 ©2023 by Eagle Group

Rev. 09/23

Spec sheets available for viewing, printing or downloading from our online literature library at our websites

Although every attempt has been made to ensure the accuracy of the information provided, we cannot be held responsible for typographical or printing errors. Information and specifications are subject to change without notice. Please confirm at time of order.