


Specification Sheet

Short Form Specifications

Solid 14 gauge type 304 worksurface with #4 brushed stainless steel finish. Available with 1% C-frame or H-frame tubular base, or with undershelf base. Uni-lok® gusset system. Stainless bullet feet adjustable to 1".





Options / Accessories

Welded	construction	C-frame
WULLUCU	COHOLIGICAL	U-II allic

☐ Welded construction H-frame

Casters

□ Glides

□ Foot Rest*

☐ Upgrade to type 316 stainless steel construction (add suffix "-316". Ex: CRT2424T-C-316)

Item No.: ______ Project No.: _____ S.I.S. No.: _____

Cleanroom Tables with Brushed Stainless Solid Tabletop

MODELS:

☐ CRT2424T-*	☐ CRT3030T-*	☐ CRT3636T-*
□ CRT2436T-*	□ CRT3036T-*	□ CRT3648T-*
☐ CRT2448T-*	□ CRT3048T-*	□ CRT3660T-*
□ CRT2460T-*	□ CRT3060T-*	□ CRT3672T-*
□ CRT2472T-*	□ CRT3072T-*	□ CRT3684T-*
□ CRT2484T-*	□ CRT3084T-*	□ CRT3696T-*
☐ CDT2/106T_*	□ CRT2006T_*	

Design and Construction Features

- Heavy gauge type 304 all stainless steel construction.
- Tops are 14 gauge brushed stainless steel, reinforced with heavy gauge hat channels. Alcohol-wiped and cleanroom bagged.
- 1½" (38mm)-diameter, rolled down edges at front and rear.
- Ends turned down 90° at 1½" (38mm) providing for flush installations when required.
- Base assembly incorporates the "strength by design" patented uni-lok® (patent #5,165,349) stainless steel gusset system which is welded into hat channel, reducing lateral movement.
- Legs and crossbracing are 16 gauge 15%" (41mm)-diameter, with welded crossbracing front-to-back and choice of center or rear knocked-down crossbracing.
- Undershelves are heavy gauge construction with hat channel reinforcement on tables 84" (2134mm) and longer.
- Tables supplied with 1" (25mm) adjustable stainless steel bullet feet.
- All tables provided with stainless steel assembly hardware and are shipped knock-down.
- 35½" overall height.
- Custom sizes available.

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA Phone: 302-653-3000 • 800-441-8440 • Fax: 302-653-2065

www.eaglegrp.com www.eaglemhc.com

For custom configuration or fabrication needs, contact our **SpecFAB® Division**. Phone: 302-653-3000 • Fax: 302-653-2065 • e-mail: quotes@eaglegrp.com



EG04.02A Rev. 01/25


^{*} See spec sheet #EG04.14 for Foot Rest


^{*} See chart on back for complete model numbers.




Item No.:	
Project No.:	
S.I.S. No.:	

Cleanroom Tables with Brushed Stainless Solid Tabletop





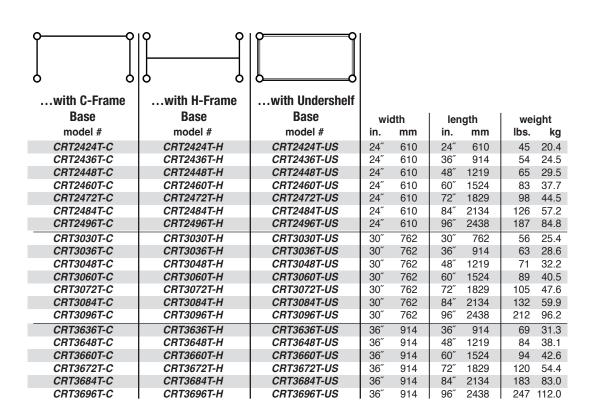

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA Phone: 302-653-3000 or 800-441-8440 • Fax: 302-653-2065

www.eaglegrp.com • www.eaglemhc.com

Printed in U.S.A. ©2025 by Eagle Group


Rev. 01/25




Specification Sheet

Short Form Specifications

Perforated 14 gauge type 304 worksurface with #4 brushed stainless steel finish. Perforations are $\frac{3}{4}$ -diameter on 1" centers. Available with $1\frac{5}{8}$ " C-frame or H-frame tubular base, or with undershelf base. Uni-lok® gusset system. Stainless bullet feet adjustable to 1".





Options / Accessories

	Welded	construction	C-frame
_	WEIGEG	COHSHUCHON	U-II allie

☐ Welded construction H-frame

Casters

☐ Glides

☐ Foot Rest*

☐ Upgrade to type 316 stainless steel construction (add suffix "-316". Ex: CRPT2424T-C-316)

Item No.: ______ Project No.: _____ S.I.S. No.: _____

Cleanroom Tables with Brushed Stainless Perforated Tabletop

MODELS:

☐ CRPT2424T-*	☐ CRPT3030T-*	☐ CRPT3636T-*
☐ CRPT2436T-*	□ CRPT3036T-*	☐ CRPT3648T-*
☐ CRPT2448T-*	□ CRPT3048T-*	☐ CRPT3660T-*
☐ CRPT2460T-*	□ CRPT3060T-*	☐ CRPT3672T-*
☐ CRPT2472T-*	□ CRPT3072T-*	□ CRPT3684T-*
☐ CRPT2484T-*	□ CRPT3084T-*	☐ CRPT3696T-*
CDDT240GT_*	CDDT2006T_*	

Design and Construction Features

- Heavy gauge type 304 all stainless steel construction.
- Tops are 14 gauge brushed stainless steel, reinforced with heavy gauge hat channels. Alcohol-wiped and cleanroom bagged.
- 1½" (38mm)-diameter, rolled down edges at front and rear.
- Ends turned down 90° at 1½" (38mm) providing for flush installations when required.
- Base assembly incorporates the "strength by design" patented uni-lok® (patent #5,165,349) stainless steel gusset system which is welded into hat channel, reducing lateral movement.
- Legs and crossbracing are 16 gauge 15% (41mm)-diameter, with welded crossbracing front-to-back and choice of center or rear knocked-down crossbracing.
- Perforations are ³/₄" (19mm)-diameter on 1" (25mm) centers to allow a minimum 40% laminar flow.
- Tables supplied with 1" (25mm) adjustable stainless steel bullet feet.
- All tables provided with stainless steel assembly hardware and are shipped knock-down.
- 35½" overall height.
- Custom sizes available.

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA Phone: 302-653-3000 • 800-441-8440 • Fax: 302-653-2065

www.eaglegrp.com www.eaglemhc.com

For custom configuration or fabrication needs, contact our **SpecFAB® Division**. Phone: 302-653-3000 • Fax: 302-653-2065 • e-mail: quotes@eaglegrp.com




^{*} See spec sheet #EG04.14 for Foot Rest


^{*} See chart on back for complete model numbers.




Item No.:	
Project No.: .	
S.I.S. No.:	

Cleanroom Tables with Brushed Stainless Perforated Tabletop





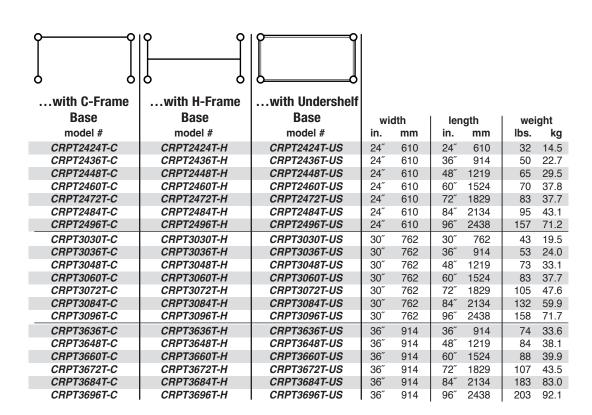

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA Phone: 302-653-3000 or 800-441-8440 • Fax: 302-653-2065

www.eaglegrp.com • www.eaglemhc.com

Printed in U.S.A. ©2025 by Eagle Group

Rev. 01/25




Specification Sheet

Short Form Specifications

Solid 14 gauge type 304 worksurface with #4 brushed stainless steel finish. Available with 1% C-frame or H-frame tubular base, or with undershelf base. Uni-lok® gusset system. $4\frac{1}{2}$ high backsplash. Stainless bullet feet adjustable to 1".





Options / Accessories

□ Welded	construction	C-frame
III WEIUEU	COHOLI UCLION	U-II allic

☐ Welded construction H-frame

Casters

□ Glides

☐ Foot Rest*

☐ Upgrade to type 316 stainless steel construction (add suffix "-316". Ex: CRT2436T-US-BS-316)

Item No.: ______ Project No.: _____ S.I.S. No.: ____

Cleanroom Tables with Brushed Stainless Solid Tabletop with Backsplash

MODELS:

□ CRT2424T-*-BS	□ CRT3030T-*-BS	☐ CRT3636T-*-BS
☐ CRT2436T-*-BS	□ CRT3036T-*-BS	☐ CRT3648T-*-BS
☐ CRT2448T-*-BS	□ CRT3048T-*-BS	☐ CRT3660T-*-BS
☐ CRT2460T-*-BS	□ CRT3060T-*-BS	☐ CRT3672T-*-BS
☐ CRT2472T-*-BS	□ CRT3072T-*-BS	□ CRT3684T-*-B\$
☐ CRT2484T-*-BS	□ CRT3084T-*-BS	☐ CRT3696T-*-BS
☐ CRT2496T-*-BS	□ CRT3096T-*-BS	

Design and Construction Features

- · Heavy gauge type 304 all stainless steel construction.
- Tops are 14 gauge brushed stainless steel, reinforced with heavy gauge hat channels. Alcohol-wiped and cleanroom bagged.
- 1½" (38mm)-diameter, rolled down edges at front.
- 41/2" (114mm)-high 90° backsplash.
- Ends turned down 90° at 1½" (38mm) providing for flush installations when required.
- Base assembly incorporates the "strength by design" patented uni-lok® (patent #5,165,349) stainless steel gusset system which is welded into hat channel, reducing lateral movement.
- Legs and crossbracing are 16 gauge 15/8" (41mm)-diameter, with welded crossbracing front-to-back and choice of center or rear knocked-down crossbracing.
- Undershelves are heavy gauge construction with hat channel reinforcement on tables 84" (2134mm) and longer.
- Tables supplied with 1" (25mm) adjustable stainless steel bullet feet.
- All tables provided with stainless steel assembly hardware and are shipped knock-down.
- 35½" overall height.
- Custom sizes available.

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA Phone: 302-653-3000 • 800-441-8440 • Fax: 302-653-2065

www.eaglegrp.com www.eaglemhc.com

For custom configuration or fabrication needs, contact our **SpecFAB® Division**. Phone: 302-653-3000 • Fax: 302-653-2065 • e-mail: quotes@eaglegrp.com



EG04.02E Rev. 01/25


^{*} See spec sheet #EG04.14 for Foot Rest


^{*} See chart on back for complete model numbers.



Item No.:	
Project No.:	
S.I.S. No.:	

Cleanroom Tables with Brushed Stainless Steel Solid Tabletop with Backsplash

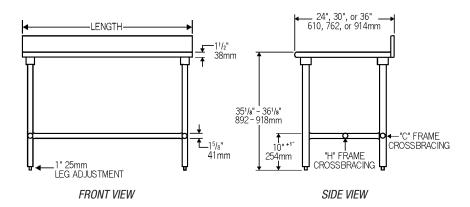

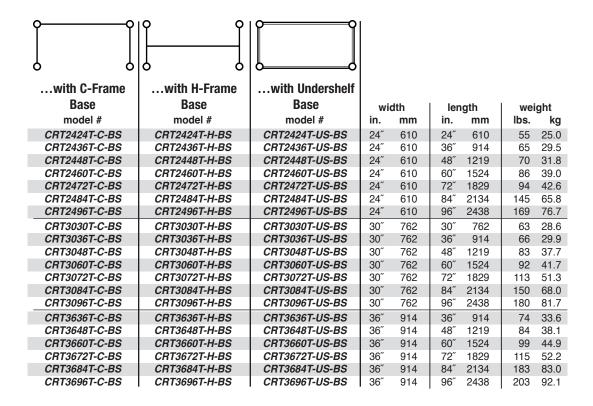

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA Phone: 302-653-3000 or 800-441-8440 • Fax: 302-653-2065

www.eaglegrp.com • www.eaglemhc.com

Printed in U.S.A. ©2025 by Eagle Group

Rev. 01/25




Specification Sheet

Short Form Specifications

Perforated 14 gauge type 304 worksurface with #4 brushed stainless steel finish. Perforations are 3/4"-diameter on 1" centers. Available with 15/4" C-frame or H-frame tubular base, or with undershelf base. Uni-lok® gusset system. 41/2"-high backsplash. Stainless bullet feet adjustable to 1".





Options / Accessories

□ Welded	construction	C-frame
_ vvciucu	COLISII UCIIOLI	U-II allic

- ☐ Welded construction H-frame
- Casters
- ☐ Glides
- ☐ Foot Rest*
- ☐ Upgrade to type 316 stainless steel construction (add suffix "-316". Ex: CRPT3048T-H-BS-316)

Item No.: ______ Project No.: _____ S.I.S. No.: ____

Cleanroom Tables with Brushed Stainless Perforated Tabletop with Backsplash

MODELS:

☐ CRPT2424T-*-BS	☐ CRPT3030T-*-BS	☐ CRPT3636T-*-BS
□ CRPT2436T-*-BS	□ CRPT3036T-*-BS	□ CRPT3648T-*-BS
□ CRPT2448T-*-BS	☐ CRPT3048T-*-BS	☐ CRPT3660T-*-BS
□ CRPT2460T-*-BS	□ CRPT3060T-*-BS	□ CRPT3672T-*-BS
□ CRPT2472T-*-BS	□ CRPT3072T-*-BS	□ CRPT3684T-*-BS
□ CRPT2484T-*-BS	□ CRPT3084T-*-BS	☐ CRPT3696T-*-BS
☐ <i>CRPT2496T-*-BS</i>	☐ <i>CRPT3096T-*-BS</i>	

Design and Construction Features

- Heavy gauge type 304 all stainless steel construction.
- Tops are 14 gauge brushed stainless steel, reinforced with heavy gauge hat channels. Alcohol-wiped and cleanroom bagged.
- 1½" (38mm)-diameter, rolled down edges at front.
- 41/2" (114mm)-high 90° backsplash.
- Ends turned down 90° at 1½" (38mm) providing for flush installations when required.
- Base assembly incorporates the "strength by design" patented uni-lok® (patent #5,165,349) stainless steel gusset system which is welded into hat channel, reducing lateral movement.
- Legs and crossbracing are 16 gauge 15/8" (41mm)-diameter, with welded crossbracing front-to-back and choice of center or rear knocked-down crossbracing.
- Perforations are ¾" (19mm)-diameter on 1" (25mm) centers to allow a minimum 40% laminar flow.
- Undershelves are heavy gauge construction with hat channel reinforcement on tables 84" (2134mm) and longer.
- Tables supplied with 1" (25mm) adjustable stainless steel bullet feet.
- All tables provided with stainless steel assembly hardware and are shipped knock-down.
- 351/2" overall height.
- · Custom sizes available.

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA Phone: 302-653-3000 • 800-441-8440 • Fax: 302-653-2065

www.eaglegrp.com www.eaglemhc.com

For custom configuration or fabrication needs, contact our **SpecFAB® Division**. Phone: 302-653-3000 • Fax: 302-653-2065 • e-mail: quotes@eaglegrp.com



EG04.02F Rev. 01/25


^{*} See spec sheet #EG04.14 for Foot Rest


^{*} See chart on back for complete model numbers.



Item No.:	_
Project No.:	-
S.I.S. No.:	-

Cleanroom Tables with Brushed Stainless Steel **Perforated Tabletop with Backsplash**

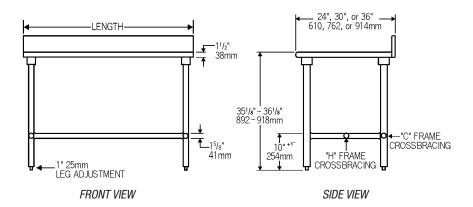

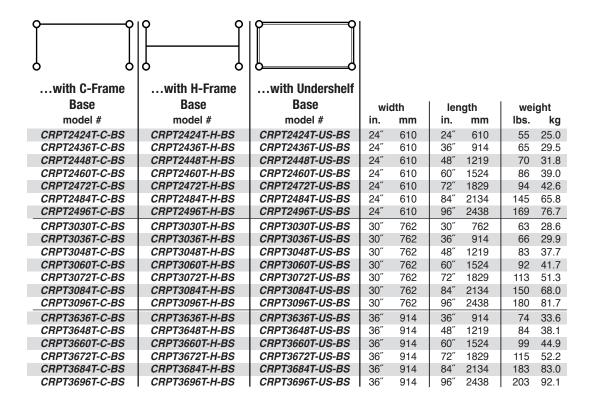

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA Phone: 302-653-3000 or 800-441-8440 • Fax: 302-653-2065 www.eaglegrp.com • www.eaglemhc.com

Printed in U.S.A. ©2025 by Eagle Group