



Profit from the Eagle Advantage®

Specification Sheet

Short Form Specifications

Standard fixed bay units have inside slide dimension of 17¹/₆" in one-, two-, or three-bay configuration. Three sets of slides standard with 1¹/₂" vertical opening. Slides adjustable on 1" centers. 68" overall height, 26" depth. 5" resilient swivel casters. Single-bay adjustable unit inside dimension varies from 15¹/₂" to 24¹/₆". All units chrome plated.



one-bay tote box carrier shown with optional tote boxes

Options / Accessories

- Tote boxes*
- Dividers*
- Aluminum split sleeves** (add suffix "-ESD")
- Additional slides (see back page of this spec sheet)

* Only the TB3000 series tote boxes fit the Non-Adjustable Tote Box Carriers. See Spec Sheet EG07.09 for more information.

** Example: TBC1-R-ESD

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA
 Phone: 302-653-3000 • 800-441-8440 • Fax: 302-653-2065
www.eaglegrp.com
www.eaglegrpnews.com
www.eaglemhc.com

For custom configuration or fabrication needs, contact our SpecFAB® Division.
Phone: 302-653-3000 • Fax: 302-653-2065 • e-mail: quotes@eaglegrp.com

Item No.:	_____
Project No.:	_____
S.I.S. No.:	_____

Tote Box Carriers

MODELS:

- | | |
|---------------------------------|---------------------------------|
| <input type="checkbox"/> TBC-R | <input type="checkbox"/> TBC2-P |
| <input type="checkbox"/> TBC-P | <input type="checkbox"/> TBC3-R |
| <input type="checkbox"/> TBC1-R | <input type="checkbox"/> TBC3-P |
| <input type="checkbox"/> TBC1-P | <input type="checkbox"/> TBC-S |
| <input type="checkbox"/> TBC2-R | <input type="checkbox"/> TBC-SD |

Design and Construction Features

- Accommodates a wide variety of containers.
- Comes standard with three sets of tote box slides constructed of 16 gauge chrome plated steel with a channel opening of 1¹/₂" (29mm).
- Frames constructed of 1" (25mm) square chrome plated tubing and 16 gauge chrome plated steel.
- Posts are 63" (1600mm), constructed of 16 gauge chrome plated steel and grooved, numbered on 1" (25mm) centers for slide height adjustability.
- One, two, or three-bay carrier models available.
- Each carrier comes standard with resilient or poly casters, two brake and two swivel.
- All models are 68" (1727mm) high (including casters,) and 26" (660mm) length from front to back.







Item No.: _____
 Project No.: _____
 S.I.S. No.: _____

Tote Box Carriers


Top and Front views

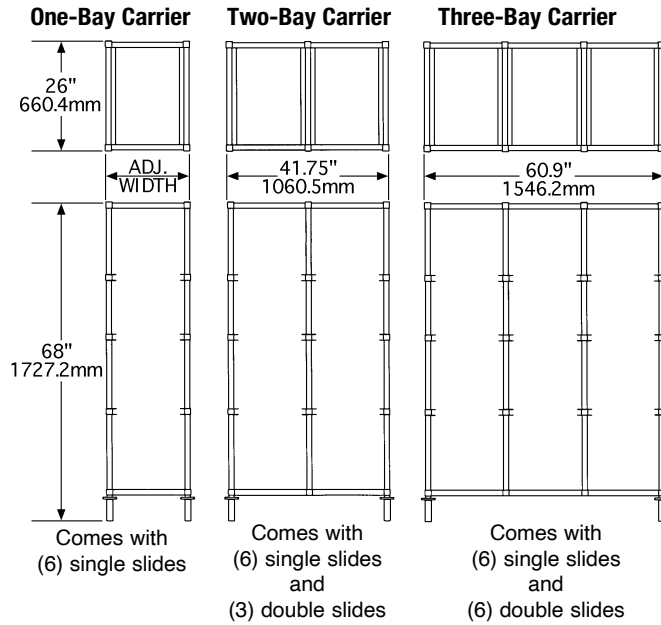


Side view of all models



standard non-adjustable unit

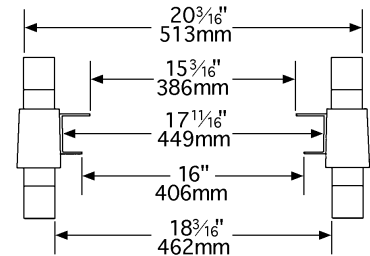


adjustable units

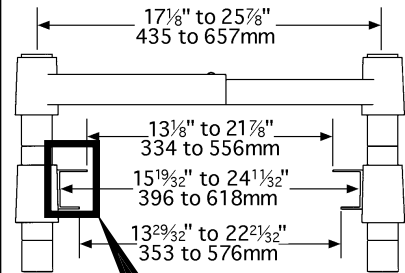

Inside Clearances

Adjustable unit: slide section only



One-Bay Tote Box Carriers

model #	width		length		weight		caster type	description
	in.	mm	in.	mm	lbs.	kg		
TBC1-R	26"	660	22 3/4"	575	55	24.9	resilient	1 section, non-adjustable
TBC1-P	26"	660	22 3/4"	575	55	24.9	poly	1 section, non-adjustable
TBC-R	26"	660	20 3/4"-29 3/4"	524-746	55	24.9	resilient	1 section, adjustable
TBC-P	26"	660	20 3/4"-29 3/4"	524-746	55	24.9	poly	1 section, adjustable

Two-Bay Tote Box Carriers

model #	width		length		weight		caster type	description
	in.	mm	in.	mm	lbs.	kg		
TBC2-R	26"	660	41 1/4"	1060	112	50.8	resilient	2 section, non-adjustable
TBC2-P	26"	660	41 1/4"	1060	112	50.8	poly	2 section, non-adjustable

Three-Bay Tote Box Carriers

model #	width		length		weight		caster type	description
	in.	mm	in.	mm	lbs.	kg		
TBC3-R	26"	660	60 1/4"	1546	168	76.2	resilient	3 section, non-adjustable
TBC3-P	26"	660	60 1/4"	1546	168	76.2	poly	3 section, non-adjustable

Tote Box Slides

Made of 16 gauge chrome plated steel with a channel opening of 1 1/8" (29mm).

model #	type	weight	
		lbs.	kg
TBC-S	single slides	1.5	0.7
TBC-SD	double slide	3.0	1.4

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA

Phone: 302-653-3000 or 800-441-8440 • Fax: 302-653-2065

www.eaglegrp.com • www.eaglegrpnews.com • www.eaglehmc.com

Printed in U.S.A.
 ©2023 by Eagle Group

Rev. 07/23

Spec sheets available for viewing, printing or downloading from our online literature library at our websites

Although every attempt has been made to ensure the accuracy of the information provided, we cannot be held responsible for typographical or printing errors. Information and specifications are subject to change without notice. Please confirm at time of order.