



Profit from the Eagle Advantage®

# Specification Sheet

## Short Form Specifications


Overall cart dimension 31¼" width x 21½" length for end-load models. Overall cart dimension of 21½" width x 31¼" length for side-load models. Full height model, in front- or end-load models, allows for 30 trays. Half height model, in front- or end-load models, allows for 20 trays. 5"-diameter 50 shore A polyurethane wheels. Optional conductive split sleeves and grounding cables provide ESD characteristic. Front and back tray locks.

Item No.:	_____
Project No.:	_____
S.I.S. No.:	_____

## Electronic Vibration Dampening Tray Carts

### MODELS:

- ETCE20-Z
- ETCE30-Z
- ETCS20-Z
- ETCS30-Z

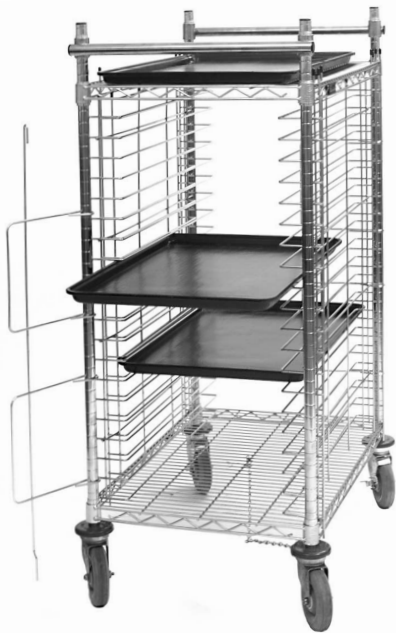

*ETCE20-Z  
half size, end load model  
with optional drag chain  
and ESD trays*

### Design and Construction Features

- Provides maximum benefits in vibration transfer, ESD safety, and cost.
- Aluminum split sleeves.
- Wire shelves, posts, push handles, and locks are chrome-plated.
- Vibration transfer is dramatically reduced via polyurethane 50 shore A casters—5" (127mm)-diameter, swivel, two with brake.
- Aluminum split sleeves and an optional grounding device (ESD grounding cable or anti-static drag chain) make carts ESD-safe.
- Front and rear locks to ensure product safety.
- End- and side-load units available.
- Full height and half height units available.
- Half height models feature push handles.

### Options / Accessories

- ESD Tray
- ESD Grounding Cable
- Anti-Static Drag Chain

### EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA  
Phone: 302-653-3000 • 800-441-8440 • Fax: 302-653-2065  
www.eaglegrp.com  
www.eaglemhc.com

For custom configuration or fabrication needs, contact our SpecFAB® Division.  
Phone: 302-653-3000 • Fax: 302-653-2065 • e-mail: quotes@eaglegrp.com

EG07.04 Rev. 10/23


Spec sheets available for viewing, printing or downloading from our online literature library at our websites

Eagle Foodservice Equipment, Eagle MHC, and SpecFAB® are divisions of Eagle Group. ©2023 by the Eagle Group



Item No.: \_\_\_\_\_  
 Project No.: \_\_\_\_\_  
 S.I.S. No.: \_\_\_\_\_


## Electronic Vibration Dampening Tray Carts

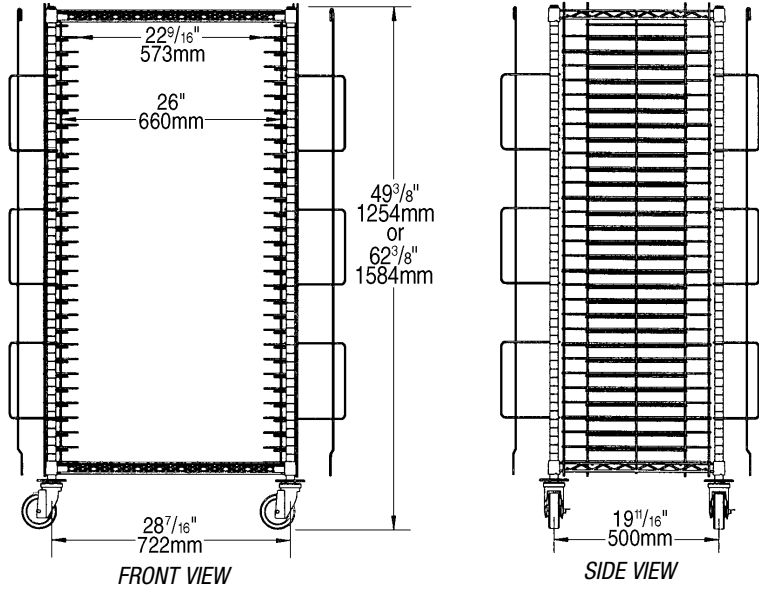

model #	description	overall dimensions						weight		sliding space		full size pan capacity
		width in.	width mm	length in.	length mm	height in.	height mm	lbs.	kg	in.	mm	
ETCE20-Z	end load, half height	31 3/4"	807	21 5/8"	543	49 3/8"	1254	80	36.3	1 3/4"	45	20
ETCE30-Z	end load, full height	31 3/4"	807	21 5/8"	543	62 3/8"	1584	97	44.0	1 3/4"	45	30
ETCS20-Z	side load, half height	21 5/8"	543	31 3/4"	807	49 3/8"	1254	80	36.3	1 3/4"	45	20
ETCS30-Z	side load, full height	21 5/8"	543	31 3/4"	807	62 3/8"	1584	97	44.0	1 3/4"	45	30


### Options for Electronic Tray Carts

**ESD Grounding Cable**  
 Provides greater dependability on mobile units. Replaces conductive casters when used with conductive split sleeves. Easily installed.



model # GC-16

**Anti-Static Drag Chain**  
 16" (406mm) long. Used for conductive applications.



model # DC16-S

**EAGLE GROUP**  
 100 Industrial Boulevard, Clayton, DE 19938-8903 USA  
 Phone: 302-653-3000 or 800-441-8440 • Fax: 302-653-2065  
 www.eaglegrp.com • www.eaglemhc.com

Printed in U.S.A.  
 ©2023 by Eagle Group  
 Rev. 10/23

Spec sheets available for viewing, printing or downloading from our online literature library at our websites

Although every attempt has been made to ensure the accuracy of the information provided, we cannot be held responsible for typographical or printing errors. Information and specifications are subject to change without notice. Please confirm at time of order.