




Profit from the Eagle Advantage®

# Specification Sheet

## Short Form Specifications

Overall cart dimensions of 31¼" width x 21½" length for end-load models. Overall cart dimensions of 21½" width x 31¼" length for side-load models. Transports 17⅞" x 25¼" trays. Slides with 1½" spacing carry 38 trays. Slides with 3" spacing carry 20 trays. Overall height of 67½". Four 5" resilient swivel casters, two with brake.

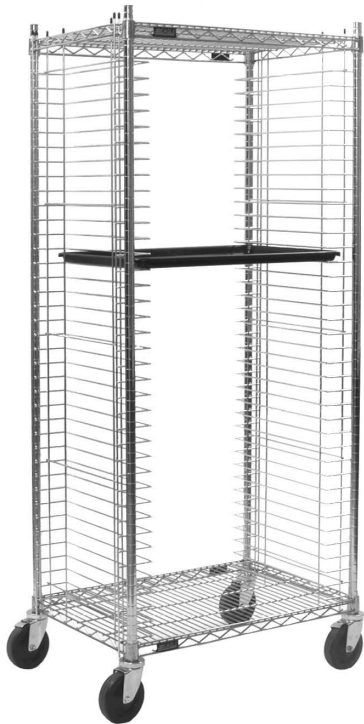

*electronic tray cart, side load,  
with optional ESD tray*

## Options / Accessories

- ESD Tray
- ESD Grounding Cable
- Anti-Static Drag Chain

## EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA  
 Phone: 302-653-3000 • 800-441-8440 • Fax: 302-653-2065  
[www.eaglegrp.com](http://www.eaglegrp.com)  
[www.eaglemhc.com](http://www.eaglemhc.com)

For custom configuration or fabrication needs, contact our **SpecFAB® Division**.  
 Phone: 302-653-3000 • Fax: 302-653-2065 • e-mail: [quotes@eaglegrp.com](mailto:quotes@eaglegrp.com)

Item No.:	_____
Project No.:	_____
S.I.S. No.:	_____

## Electronic Tray Carts

### MODELS:

- WTRE38-Z**
- WTRE20-Z**
- WTRS38-Z**
- WTRS20-Z**


### Design and Construction Features

- A practical and economic method of transporting or storing 17⅞" x 25¼" (454 x 654mm) conductive trays.
- Zinc-plated wire shelves, chrome posts, and aluminum split sleeves.
- 5" (127mm)-diameter swivel casters with resilient tread, two with brake.
- Units can be made conductive by adding an optional drag chain or ESD grounding cable.
- End-load and side-load units available.
- No tools required for assembly.
- Shipped knocked down.



Item No.: \_\_\_\_\_  
 Project No.: \_\_\_\_\_  
 S.I.S. No.: \_\_\_\_\_

# Electronic Tray Carts

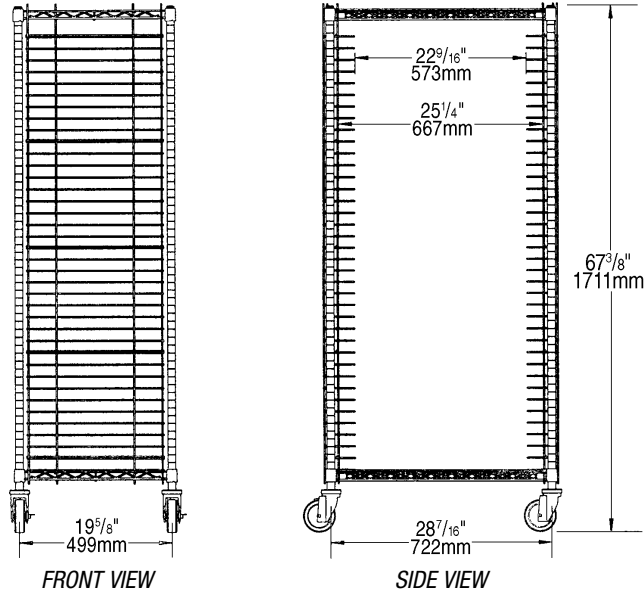


(#WTRS38-Z shown)

model #	description	overall dimensions						weight		sliding space		full size pan capacity
		width in.	width mm	length in.	length mm	height in.	height mm	lbs.	kg	in.	mm	
WTRE38-Z	end load	30"	762	21"	533	67 3/8"	1711	65	29.5	1 1/2"	38	38
WTRE20-Z	end load	30"	762	21"	533	67 3/8"	1711	74	33.6	3"	76	20
WTRS38-Z	side load	21"	533	30"	762	67 3/8"	1711	65	29.5	1 1/2"	38	38
WTRS20-Z	side load	21"	533	30"	762	67 3/8"	1711	74	33.6	3"	76	20

## Options for Electronic Tray Carts

### ESD Grounding Cable


Provides greater dependability on mobile units. Replaces conductive casters when used with conductive split sleeves. Easily installed.



model #  
GC-16

### Anti-Static Drag Chain

16" (406mm) long. Used for conductive applications.



model #  
DC16-S

**EAGLE GROUP**  
 100 Industrial Boulevard, Clayton, DE 19938-8903 USA  
 Phone: 302-653-3000 or 800-441-8440 • Fax: 302-653-2065  
 www.eaglegrp.com • www.eaglehmc.com

Printed in U.S.A.  
 ©2023 by Eagle Group  
 Rev. 10/23

Spec sheets available for viewing, printing or downloading from our online literature library at our websites

Although every attempt has been made to ensure the accuracy of the information provided, we cannot be held responsible for typographical or printing errors. Information and specifications are subject to change without notice. Please confirm at time of order.