INSTRUCTION SHEET #A218107

## **Solid Shelving**

# **ASSEMBLY INSTRUCTIONS**

#### **CAUTION**

INSPECT CONTENTS IMMEDIATELY AND FILE CLAIM WITH DELIVERING
CARRIER FOR ANY DAMAGE. **SAVE YOUR BOX AND ALL PACKING MATERIALS.**YOU ARE RESPONSIBLE FOR DAMAGE TO YOUR UNIT IF RETURNED IMPROPERLY PACKED.

#### **BEFORE ASSEMBLY, PLEASE READ:**

#### **Helpful Suggestions:**


- Shelves up to 48" in length can support an evenly distributed static load of 800 lbs.
- Shelves of 54", 60", and 72" length can support an evenly distributed static load of 600 lbs.
- IMPORTANT: Shelving units should not exceed 2400 lbs. per set of four posts.
- Large installations are easier if all posts are marked first. Lay posts on floor with leveling bolts against a wall or straight edge. Mark all posts using a magic marker or grease pencil.
- Caster Load: 3x the caster rating. Unit total not to exceed 900 lbs.

#### **For Best Performance:**

- Units over 50" high should be assembled with no less than 3 shelves—preferably 4 or more—and the bottom shelf should be placed as low as possible or practical.
- On mobile units with 18"-wide shelves, the overall post height should be no greater than 74".
- On mobile units with 24"-wide shelves, the overall post height should be no greater than 86".

#### **FOR STARTER UNITS:**

(For Caster Carts, see page 3 on how to install casters BEFORE assembling unit.)

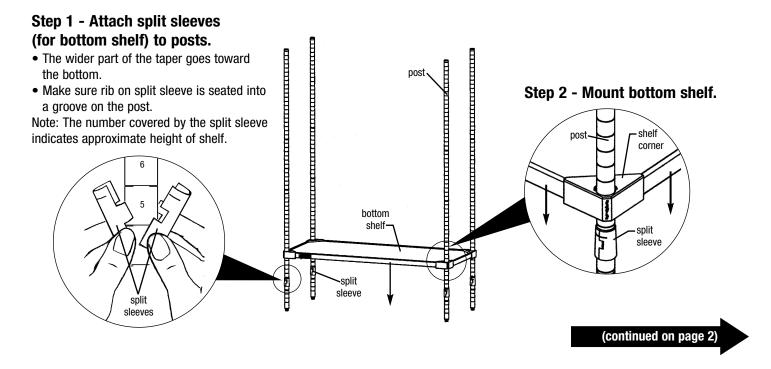


EG10034 Revised 12/23



- 100 Industrial Boulevard, Clayton, Delaware 19938-8903 U.S.A.
- Phone: 302/653-3000 800/441-8440 Fax: 302/653-2065
- www.eaglegrp.com www.eaglemhc.com

# Solid Shelving ASSEMBLY INSTRUCTIONS

### **FOR STARTER UNITS (continued):**

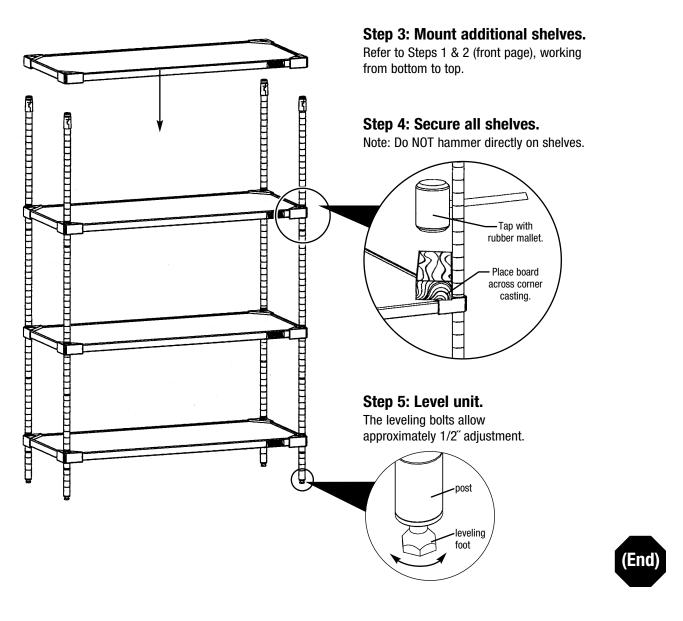



#### **WARNING – TIPPING HAZARD**



- Do not step, stand or climb on shelving units.
- Place heavy objects on lowest shelf.

Failure to follow these guidelines can result in property damage or personal injury.

For Caster Carts, see page 3.


# **Solid Shelving**

# **ASSEMBLY INSTRUCTIONS**


#### **FOR CASTER CARTS:**

Step 1 - Place donut bumpers onto bottom end of post.

Bottom is end with hole for caster stem.




Step 2 (for rigid casters only. Otherwise, proceed to Step 3) - Place alignment channel onto stems of rigid casters.



Step 3 - Drive in caster using a hammer or mallet.

Several solid blows are usually required.



# Step 4 - Mount shelves. Refer to Steps 1 & 2 (front page), working from bottom to top. shelf corner split sleeve



#### **Notes about Caster Carts:**

- IMPORTANT: Mobile units should not exceed 900 lbs. per set of four posts.
- First shelf should be located at bottom groove for most stability.
- Do not construct carts with shelves less than 18" wide.
- Inspect and maintain casters regularly. Replace casters that are damaged or severely worn.




#### **WARNING – TIPPING HAZARD**




- Push mobile units in long direction.
- Use caution when moving heavily loaded carts. Heavy loads are hard to control.
- Do not step, stand or climb on shelving units.
- · Place heavy objects on lowest shelf.
- Inspect casters before use.
- Replace casters that are worn immediately.

Failure to follow these guidelines can result in property damage or personal injury.

# Solid Shelving ASSEMBLY INSTRUCTIONS

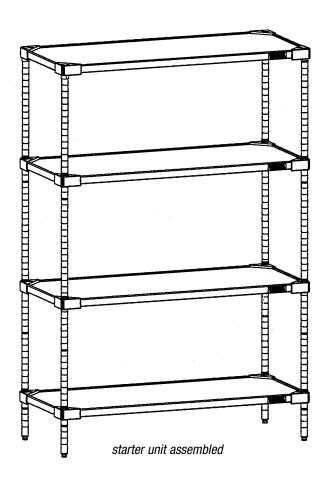

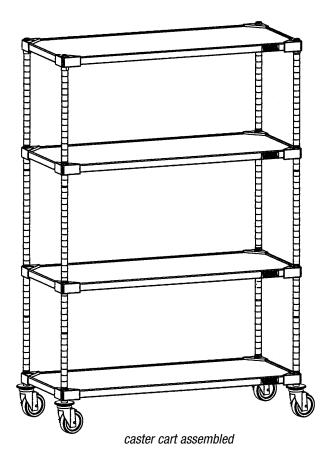



- 100 Industrial Boulevard, Clayton, Delaware 19938-8903 U.S.A.
- Phone: 302/653-3000 800/441-8440 Fax: 302/653-2065
- www.eaglegrp.com www.eaglemhc.com