



Profit from the Eagle Advantage®

Specification Sheet

Short Form Specifications

Eagle Spec-Master® One-Compartment Sinks, model _____, Unit constructed of 14 gauge 300 series, 18-8 stainless steel throughout. Sink bowls covered with a full $\frac{5}{8}$ " radius, and shall have a 14" water level. Drainboards, when required, shall be "V" creased for positive drainage. 9 $\frac{1}{2}$ " high backsplash with 1" upturn and tile edge. Legs to be 1 $\frac{1}{2}$ " O.D., stainless steel, with stainless steel gussets, stainless steel crossbracing and adjustable stainless steel bullet feet.



one-compartment FN sink

Options / Accessories

- | | |
|--|--|
| ☐ Lever drain | ☐ Sink kits |
| ☐ Lever drain with overflow | ☐ Faucets |
| ☐ Twist handle drains | ☐ Polyboard sink covers |
| ☐ Overflow hole | ☐ Stainless steel sink covers |

Assembly:

- Entire assembly is fuse-welded and planished, providing a one-piece seamless sink unit.
- Welded areas are high-speed belt blended to match adjacent surfaces with continuity of satin finish.
- All outside corners of assembly are bullnosed to provide safe, clean edges.
- Water supply is $\frac{1}{2}$ " (13mm) NPS for hot and cold lines.

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA
Phone: 302-653-3000 • 800-441-8440 • Fax: 302-653-2065
www.eaglegrp.com
www.eaglehmc.com

For custom configuration or fabrication needs, contact our SpecFAB® Division.
Phone: 302-653-3000 • Fax: 302-653-2065 • e-mail: quotes@eaglegrp.com

Item No.: _____
Project No.: _____
S.I.S. No.: _____

Spec-Master® FN Series Coved Corner One-Compartment Sinks

MODELS:

- | | |
|-------------------------------------|-------------------------------------|
| ☐ FN2016-1-* | ☐ FN2424-1-* |
| ☐ FN2018-1-* | ☐ FN2820-1-* |
| ☐ FN2020-1-* | |

* See chart on back for complete model numbers.

Top:

- Drainboards, backsplash and rolled rims are 14 gauge 300 series stainless steel.
- Drainboards, when provided, are integrally welded.
- All rolled edges are highlighted for enhanced appearance.
- 9 $\frac{1}{2}$ " high backsplash with 1" upturn and tile edge.
- 1 $\frac{1}{8}$ " (29mm) faucet holes punched on 8" (203mm) centers.

Base:

- Legs: 1 $\frac{1}{2}$ " (41mm)-diameter stainless steel tubing with stainless steel gussets and fully adjustable stainless steel bullet feet.
- Crossbracing: Adjustable, 1 $\frac{1}{4}$ " (32mm)-diameter stainless steel; running left-to-right and front-to-back.
- Leg locations fall directly under sink bowl*, providing increased stability and maximum weight support.
- Leg gussets welded to a die-cut heavy-gauge stainless steel reinforcing corner plate.
- Legs are crossbraced on all sides for increased stability.

Sink Bowl:

- 14 gauge 300 series stainless steel.
- 14" (356mm) water level, 17" (432mm) flood level.
- Sink compartment coved on a full $\frac{5}{8}$ " (41mm) radius and constructed using state-of-the-art seamless welding techniques.
- Basket-type waste drain fits sink bowl's 3 $\frac{1}{2}$ " (89mm) opening and features 1 $\frac{1}{2}$ " (38mm) outlet.

* On sinks with drainboard(s) 30" or longer, legs are located underneath the outer end of drainboard(s).

Certifications / Approvals



AutoQuotes



EG20.32 Rev. 09/24

Spec sheets available for viewing, printing or downloading from our online literature library at our websites

Eagle Foodservice Equipment, Eagle MHC, and SpecFAB® are divisions of Eagle Group. ©2024 by the Eagle Group




Profit from the Eagle Advantage®

Item No.: _____

Project No.: _____


S.I.S. No.: _____

Spec-Master® FN Series Coved Corner One-Compartment Sinks



Drain location for rough-in

bowl width in. mm	bowl length in. mm	Dimension A	
20" 508	16" 406	14"	356
20" 508	18" 457	14"	356
20" 508	20" 508	14"	356
24" 610	24" 610	16"	406
28" 711	20" 508	18"	457



model #	BOWL DIMENSIONS				DRAINBOARD			OVERALL DIMENSIONS				weight	
	width in.	mm	length in.	mm	quantity	in.	mm	width in.	mm	length in.	mm	lbs.	kg
FN2016-1-14/3	20"	508	16"	406	0	-	-	27"	686	21"	533	55	24.9
FN2016-1-18R or L-14/3	20"	508	16"	406	1	18"	457	27"	686	37½"	953	68	30.9
FN2016-1-18-14/3	20"	508	16"	406	2	18"	457	27"	686	54"	1372	93	37.6
FN2016-1-24R or L-14/3	20"	508	16"	406	1	24"	610	27"	686	43½"	1105	80	33.1
FN2016-1-24-14/3	20"	508	16"	406	2	24"	610	27"	686	66"	1676	113	51.3
FN2016-1-30R or L-14/3	20"	508	16"	406	1	30"	762	27"	686	49½"	1257	113	51.3
FN2016-1-30-14/3	20"	508	16"	406	2	30"	762	27"	686	78"	1981	209	94.8
FN2016-1-36R or L-14/3	20"	508	16"	406	1	36"	914	27"	686	55½"	1410	156	70.8
FN2016-1-36-14/3	20"	508	16"	406	2	36"	914	27"	686	90"	2286	212	96.2
FN2018-1-14/3	20"	508	18"	457	0	-	-	27"	686	23"	584	58	26.3
FN2018-1-18R or L-14/3	20"	508	18"	457	1	18"	457	27"	686	39½"	1003	76	34.4
FN2018-1-18-14/3	20"	508	18"	457	2	18"	457	27"	686	56"	1422	96	43.5
FN2018-1-24R or L-14/3	20"	508	18"	457	1	24"	610	27"	686	45½"	1156	81	36.7
FN2018-1-24-14/3	20"	508	18"	457	2	24"	610	27"	686	68"	1727	161	73.0
FN2018-1-30R or L-14/3	20"	508	18"	457	1	30"	762	27"	686	51½"	1308	156	70.8
FN2018-1-30-14/3	20"	508	18"	457	2	30"	762	27"	686	80"	2032	118	53.5
FN2018-1-36R or L-14/3	20"	508	18"	457	1	36"	914	27"	686	57½"	1464	163	74.0
FN2018-1-36-14/3	20"	508	18"	457	2	36"	914	27"	686	92"	2337	215	97.5
FN2020-1-14/3	20"	508	20"	508	0	-	-	27"	686	25"	635	60	27.2
FN2020-1-18R or L-14/3	20"	508	20"	508	1	18"	457	27"	686	41½"	1054	138	62.6
FN2020-1-18-14/3	20"	508	20"	508	2	18"	457	27"	686	58"	1473	167	75.8
FN2020-1-24R or L-14/3	20"	508	20"	508	1	24"	610	27"	686	47½"	1207	144	65.3
FN2020-1-24-14/3	20"	508	20"	508	2	24"	610	27"	686	70"	1778	184	83.5
FN2020-1-30R or L-14/3	20"	508	20"	508	1	30"	762	27"	686	53½"	1359	157	71.2
FN2020-1-30-14/3	20"	508	20"	508	2	30"	762	27"	686	82"	2083	168	76.2
FN2020-1-36R or L-14/3	20"	508	20"	508	1	36"	914	27"	686	59½"	1511	179	81.2
FN2020-1-36-14/3	20"	508	20"	508	2	36"	914	27"	686	94"	2388	219	99.3
FN2424-1-14/3	24"	610	24"	610	0	-	-	31"	787	29"	737	122	55.3
FN2424-1-18R or L-14/3	24"	610	24"	610	1	18"	457	31"	787	45½"	1156	145	65.8
FN2424-1-18-14/3	24"	610	24"	610	2	18"	457	31"	787	62"	1575	182	82.6
FN2424-1-24R or L-14/3	24"	610	24"	610	1	24"	610	31"	787	51½"	1308	151	68.5
FN2424-1-24-14/3	24"	610	24"	610	2	24"	610	31"	787	74"	1880	182	82.6
FN2424-1-30R or L-14/3	24"	610	24"	610	1	30"	762	31"	787	57½"	1461	165	74.8
FN2424-1-30-14/3	24"	610	24"	610	2	30"	762	31"	787	86"	2184	176	79.8
FN2424-1-36R or L-14/3	24"	610	24"	610	1	36"	914	31"	787	63½"	1613	187	84.8
FN2424-1-36-14/3	24"	610	24"	610	2	36"	914	31"	787	98"	2489	220	99.8
FN2820-1-14/3	28"	711	20"	508	0	-	-	35"	889	25"	635	79	35.8
FN2820-1-18R or L-14/3	28"	711	20"	508	1	18"	457	35"	889	41½"	1054	101	45.8
FN2820-1-18-14/3	28"	711	20"	508	2	18"	457	35"	889	58"	1473	117	53.1
FN2820-1-24R or L-14/3	28"	711	20"	508	1	24"	610	35"	889	47½"	1207	114	51.7
FN2820-1-24-14/3	28"	711	20"	508	2	24"	610	35"	889	70"	1778	166	75.3
FN2820-1-30R or L-14/3	28"	711	20"	508	1	30"	762	35"	889	53½"	1359	182	82.6
FN2820-1-30-14/3	28"	711	20"	508	2	30"	762	35"	889	82"	2083	191	86.6
FN2820-1-36R or L-14/3	28"	711	20"	508	1	36"	914	35"	889	59½"	1511	189	85.7
FN2820-1-36-14/3	28"	711	20"	508	2	36"	914	35"	889	94"	2388	226	102.5

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA

Phone: 302-653-3000 or 800-441-8440 • Fax: 302-653-2065

www.eaglegrp.com • www.eaglehmc.com

Printed in U.S.A.

©2024 by Eagle Group

Rev. 09/24

Spec sheets available for viewing, printing or downloading from our online literature library at our websites

Although every attempt has been made to ensure the accuracy of the information provided, we cannot be held responsible for typographical or printing errors. Information and specifications are subject to change without notice. Please confirm at time of order.



Profit from the Eagle Advantage®

Specification Sheet

Short Form Specifications

Eagle Spec-Master® Two-Compartment Sinks, model _____, Unit constructed of 14 gauge 300 series, 18-8 stainless steel throughout. Sink bowls coved with a full $\frac{5}{8}$ " radius, and shall have a 14" water level. Drainboards, when required, shall be "V" creased for positive drainage. 9 $\frac{1}{2}$ " high backsplash with 1" upturn and tile edge. Legs to be 1 $\frac{1}{2}$ " O.D., stainless steel, with stainless steel gussets, stainless steel crossbracing and adjustable stainless steel bullet feet.



2-compartment sink

Options / Accessories

- | | |
|--|--|
| ☐ Lever drain | ☐ Faucets |
| ☐ Lever drain with overflow | ☐ Polyboard sink covers |
| ☐ Twist handle drains | ☐ Stainless steel sink covers |
| ☐ Overflow hole | ☐ Skirted front panel |
| ☐ Sink kits | |

Assembly:

- Entire assembly is fuse-welded and planished, providing a one-piece seamless sink unit.
- Welded areas are high-speed belt blended to match adjacent surfaces with continuity of satin finish.
- All outside corners of assembly are bullnosed to provide safe, clean edges.
- Water supply is $\frac{1}{2}$ " (13mm) NPS for hot and cold lines.

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA
 Phone: 302-653-3000 • 800-441-8440 • Fax: 302-653-2065
www.eaglegrp.com
www.eaglemhc.com

For custom configuration or fabrication needs, contact our **SpecFAB® Division**.
 Phone: 302-653-3000 • Fax: 302-653-2065 • e-mail: quotes@eaglegrp.com

Item No.: _____
 Project No.: _____
 S.I.S. No.: _____

Spec-Master® FN Series Coved Corner Two-Compartment Sinks

MODELS:

- | | |
|--|--|
| ☐ FN2032-2-* | ☐ FN2448-2-* |
| ☐ FN2036-2-* | ☐ FN2840-2-* |
| ☐ FN2040-2-* | |

* See table on back for complete model numbers.

Top:

- Drainboards, backsplash and rolled rims are 14 gauge 300 series stainless steel.
- Drainboards, when provided, are integrally welded.
- All rolled edges are highlighted for enhanced appearance.
- 9 $\frac{1}{2}$ " high backsplash with 1" upturn and tile edge.
- 1 $\frac{1}{8}$ " (29mm) faucet holes punched on 8" (203mm) centers.

Base:

- Legs: 1 $\frac{5}{8}$ " (41mm)-diameter stainless steel tubing with stainless steel gussets and fully adjustable stainless steel bullet feet.
- Crossbracing: Adjustable, 1 $\frac{1}{4}$ " (32mm)-diameter stainless steel; running left-to-right and front-to-back.
- Leg locations fall directly under sink bowls*, providing increased stability and maximum weight support.
- Leg gussets welded to a die-cut heavy-gauge stainless steel reinforcing corner plate.
- Legs are crossbraced on all sides for increased stability.

Sink Bowls:

- 14 gauge 300 series stainless steel.
- 14" (356mm) water level, 17" (432mm) flood level.
- Sink compartments are coved on a full $\frac{5}{8}$ " (41mm) radius and constructed using state-of-the-art seamless welding techniques.
- Basket-type waste drain fits sink bowls' 3 $\frac{1}{2}$ " (89mm) opening and features 1 $\frac{1}{2}$ " (38mm) outlet.

* On sinks with drainboard(s) 30" or longer, legs are located underneath the outer end of drainboard(s).

Certifications / Approvals



AutoQuotes



EG20.33 Rev. 09/24

Spec sheets available for viewing, printing or downloading from our online literature library at our websites

Eagle Foodservice Equipment, Eagle MHC, and SpecFAB® are divisions of Eagle Group. ©2024 by the Eagle Group



Profit from the Eagle Advantage®

Item No.: _____


Project No.: _____

S.I.S. No.: _____

Spec-Master® FN Series Coved Corner Two-Compartment Sinks

Drain location for rough-in

bowl width	bowl length	Dimension A	
in. mm	in. mm	in.	mm
20" 508	16" 406	14"	356
20" 508	18" 457	14"	356
20" 508	20" 508	14"	356
24" 610	24" 610	16"	406
28" 711	20" 508	18"	457



model #	BOWL DIMENSIONS				DRAINBOARD			OVERALL DIMENSIONS				weight	
	width		length		quantity	length		width		length		lbs.	kg
	in.	mm	in.	mm		in.	mm	in.	mm	in.	mm		
FN2032-2-14/3	20"	508	16"	406	0	-	-	27"	686	39"	991	77	34.9
FN2032-2-18R or L-14/3	20"	508	16"	406	1	18"	457	27"	686	55½"	1410	96	43.6
FN2032-2-18-14/3	20"	508	16"	406	2	18"	457	27"	686	72"	1829	133	60.3
FN2032-2-24R or L-14/3	20"	508	16"	406	1	24"	610	27"	686	61½"	1562	102	46.3
FN2032-2-24-14/3	20"	508	16"	406	2	24"	610	27"	686	84"	2134	127	57.6
FN2032-2-30R or L-14/3	20"	508	16"	406	1	30"	762	27"	686	67½"	1715	107	48.5
FN2032-2-30-14/3	20"	508	16"	406	2	30"	762	27"	686	96"	2438	152	69.0
FN2032-2-36R or L-14/3	20"	508	16"	406	1	36"	914	27"	686	73½"	1867	235	106.6
FN2032-2-36-14/3	20"	508	16"	406	2	36"	914	27"	686	108"	2743	241	109.3
FN2036-2-14/3	20"	508	18"	457	0	-	-	27"	686	43"	1092	82	37.2
FN2036-2-18R or L-14/3	20"	508	18"	457	1	18"	457	27"	686	59½"	1511	101	45.8
FN2036-2-18-14/3	20"	508	18"	457	2	18"	457	27"	686	76"	1930	120	54.4
FN2036-2-24R or L-14/3	20"	508	18"	457	1	24"	610	27"	686	65½"	1664	107	48.5
FN2036-2-24-14/3	20"	508	18"	457	2	24"	610	27"	686	88"	2235	132	59.9
FN2036-2-30R or L-14/3	20"	508	18"	457	1	30"	762	27"	686	71½"	1816	112	50.8
FN2036-2-30-14/3	20"	508	18"	457	2	30"	762	27"	686	100"	2540	142	64.4
FN2036-2-36R or L-14/3	20"	508	18"	457	1	36"	914	27"	686	77½"	1969	223	101.2
FN2036-2-36-14/3	20"	508	18"	457	2	36"	914	27"	686	112"	2845	232	105.2
FN2040-2-14/3	20"	508	20"	508	0	-	-	27"	686	47"	1194	86	39.0
FN2040-2-18R or L-14/3	20"	508	20"	508	1	18"	457	27"	686	63½"	1613	105	47.6
FN2040-2-18-14/3	20"	508	20"	508	2	18"	457	27"	686	80"	2032	211	95.7
FN2040-2-24R or L-14/3	20"	508	20"	508	1	24"	610	27"	686	69½"	1763	187	84.8
FN2040-2-24-14/3	20"	508	20"	508	2	24"	610	27"	686	92"	2337	240	108.9
FN2040-2-30R or L-14/3	20"	508	20"	508	1	30"	762	27"	686	75½"	1918	209	94.8
FN2040-2-30-14/3	20"	508	20"	508	2	30"	762	27"	686	104"	2642	258	117.0
FN2040-2-36R or L-14/3	20"	508	20"	508	1	36"	914	27"	686	81½"	2070	222	100.7
FN2040-2-36-14/3	20"	508	20"	508	2	36"	914	27"	686	116"	2946	343	155.6
FN2448-2-14/3	24"	610	24"	610	0	-	-	31"	787	55"	1397	157	71.2
FN2448-2-18R or L-14/3	24"	610	24"	610	1	18"	457	31"	787	71½"	1816	168	76.2
FN2448-2-18-14/3	24"	610	24"	610	2	18"	457	31"	787	88"	2235	207	93.8
FN2448-2-24R or L-14/3	24"	610	24"	610	1	24"	610	31"	787	77½"	1969	183	83.0
FN2448-2-24-14/3	24"	610	24"	610	2	24"	610	31"	787	100"	2540	235	106.6
FN2448-2-30R or L-14/3	24"	610	24"	610	1	30"	762	31"	787	83½"	2121	189	85.7
FN2448-2-30-14/3	24"	610	24"	610	2	30"	762	31"	787	112"	2845	330	149.7
FN2448-2-36R or L-14/3	24"	610	24"	610	1	36"	914	31"	787	89½"	2273	206	93.4
FN2448-2-36-14/3	24"	610	24"	610	2	36"	914	31"	787	124"	3150	351	159.2
FN2840-2-14/3	28"	711	20"	508	0	-	-	35"	889	47"	1194	165	74.8
FN2840-2-18R or L-14/3	28"	711	20"	508	1	18"	457	35"	889	63½"	1613	235	106.6
FN2840-2-18-14/3	28"	711	20"	508	2	18"	457	35"	889	80"	2032	289	131.1
FN2840-2-24R or L-14/3	28"	711	20"	508	1	24"	610	35"	889	69½"	1763	248	112.5
FN2840-2-24-14/3	28"	711	20"	508	2	24"	610	35"	889	92"	2337	330	149.7
FN2840-2-30R or L-14/3	28"	711	20"	508	1	30"	762	35"	889	75½"	1918	371	168.3
FN2840-2-30-14/3	28"	711	20"	508	2	30"	762	35"	889	104"	2642	382	173.3
FN2840-2-36R or L-14/3	28"	711	20"	508	1	36"	914	35"	889	81½"	2070	392	177.8
FN2840-2-36-14/3	28"	711	20"	508	2	36"	914	35"	889	116"	2946	411	186.4

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA

Phone: 302-653-3000 or 800-441-8440 • Fax: 302-653-2065

www.eaglegrp.com • www.eaglehmc.com

Printed in U.S.A.

©2024 by Eagle Group

Rev. 09/24

Spec sheets available for viewing, printing or downloading from our online literature library at our websites

Although every attempt has been made to ensure the accuracy of the information provided, we cannot be held responsible for typographical or printing errors. Information and specifications are subject to change without notice. Please confirm at time of order.



Profit from the Eagle Advantage®

Specification Sheet

Short Form Specifications

Eagle Spec-Master® Three-Compartment Sinks, model _____, Unit constructed of 14 gauge 300 series, 18-8 stainless steel throughout. Sink bowls coved with a full $\frac{5}{8}$ " radius, and shall have a 14" water level. Drainboards, when required, shall be "V" creased for positive drainage. 9 $\frac{1}{2}$ " high backsplash with 1" upturn and tile edge. Legs to be 1 $\frac{1}{2}$ " O.D., stainless steel, with stainless steel gussets, stainless steel crossbracing and adjustable stainless steel bullet feet.



3-compartment sink
(faucets not included)

Options / Accessories

- | | |
|--|--|
| ☐ Lever drain | ☐ Faucets |
| ☐ Lever drain with overflow | ☐ Polyboard sink covers |
| ☐ Twist handle drains | ☐ Stainless steel sink covers |
| ☐ Overflow hole | ☐ Skirted front panel |
| ☐ Sink kits | |

Assembly:

- Entire assembly is fuse-welded and planished, providing a one-piece seamless sink unit.
- Welded areas are high-speed belt blended to match adjacent surfaces with continuity of satin finish.
- All outside corners of assembly are bullnosed to provide safe, clean edges.
- Water supply is $\frac{1}{2}$ " (13mm) NPS for hot and cold lines.

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA
Phone: 302-653-3000 • 800-441-8440 • Fax: 302-653-2065
www.eaglegrp.com
www.eaglemhc.com

For custom configuration or fabrication needs, contact our **SpecFAB® Division**.
Phone: 302-653-3000 • Fax: 302-653-2065 • e-mail: quotes@eaglegrp.com

Item No.: _____
Project No.: _____
S.I.S. No.: _____

Spec-Master® FN Series Coved Corner Three-Compartment Sinks

MODELS:

- | | |
|--|--|
| ☐ FN2048-3-* | ☐ FN2472-3-* |
| ☐ FN2054-3-* | ☐ FN2860-3-* |
| ☐ FN2060-3-* | |

* See table on back for complete model numbers.

Top:

- Drainboards, backsplash and rolled rims are 14 gauge 300 series stainless steel.
- Drainboards, when provided, are integrally welded.
- All rolled edges are highlighted for enhanced appearance.
- 9 $\frac{1}{2}$ " high backsplash with 1" upturn and tile edge.
- 1 $\frac{1}{8}$ " (29mm) faucet holes* punched on 8" (203mm) centers.

Base:

- Legs: 1 $\frac{1}{2}$ " (41mm)-diameter stainless steel tubing with stainless steel gussets and fully adjustable stainless steel bullet feet.
- Crossbracing: Adjustable, 1 $\frac{1}{4}$ " (32mm)-diameter stainless steel; running left-to-right and front-to-back.
- Leg locations fall directly under sink bowls**, providing increased stability and maximum weight support.
- Leg gussets welded to a die-cut heavy-gauge stainless steel reinforcing corner plate.
- Legs are crossbraced on all sides for increased stability.

Sink Bowls:

- 14 gauge 300 series stainless steel.
- 14" (356mm) water level, 17" (432mm) flood level.
- Sink compartments are coved on a full $\frac{5}{8}$ " (41mm) radius and constructed using state-of-the-art seamless welding techniques.
- Basket-type waste drain fits sink bowls' 3 $\frac{1}{2}$ " (89mm) opening and features 1 $\frac{1}{2}$ " (38mm) outlet.

* Three-compartment sinks with 20" x 16" (508 x 406mm) bowls have one set of faucet holes. All others feature two sets of faucet holes.

** On sinks with drainboard(s) 30" or longer, legs are located underneath the outer end of drainboard(s).

Certifications / Approvals



AutoQuotes



EG20.34 Rev. 06/24

Spec sheets available for viewing, printing or downloading from our online literature library at our websites


Eagle Foodservice Equipment, Eagle MHC, and SpecFAB® are divisions of Eagle Group. ©2024 by the Eagle Group



Profit from the Eagle Advantage®


Item No.: _____
 Project No.: _____
 S.I.S. No.: _____

Spec-Master® FN Series Coved Corner Three-Compartment Sinks

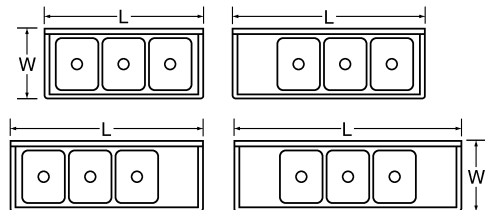

Drain location for rough-in

bowl width	bowl length	Dimension A	
in. mm	in. mm	in.	mm
20" 508	16" 406	14"	356
20" 508	18" 457	14"	356
20" 508	20" 508	14"	356
24" 610	24" 610	16"	406
28" 711	20" 508	18"	457



	BOWL DIMENSIONS				DRAINBOARD			OVERALL DIMENSIONS					
	width		length			length		width		length		weight	
model #	in.	mm	in.	mm	quantity	in.	mm	in.	mm	in.	mm	lbs.	kg
FN2048-3-14/3	20"	508	16"	406	0	-		27"	686	57"	1448	165	74.8
FN2048-3-18R or L-14/3	20"	508	16"	406	1	18"	457	27"	686	73½"	1867	176	79.8
FN2048-3-18-14/3	20"	508	16"	406	2	18"	457	27"	686	90"	2286	199	90.3
FN2048-3-24R or L-14/3	20"	508	16"	406	1	24"	610	27"	686	79½"	2019	190	86.2
FN2048-3-24-14/3	20"	508	16"	406	2	24"	610	27"	686	102"	2591	204	92.5
FN2048-3-30R or L-14/3	20"	508	16"	406	1	30"	762	27"	686	85½"	2172	200	90.7
FN2048-3-30-14/3	20"	508	16"	406	2	30"	762	27"	686	114"	2896	234	106.1
FN2048-3-36R or L-14/3	20"	508	16"	406	1	36"	914	27"	686	91½"	2324	210	95.3
FN2048-3-36-14/3	20"	508	16"	406	2	36"	914	27"	686	126"	3200	249	113.0
FN2054-3-14/3 *	20"	508	18"	457	0	-		27"	686	63"	1600	175	79.4
FN2054-3-18R or L-14/3 *	20"	508	18"	457	1	18"	457	27"	686	79½"	2019	186	84.4
FN2054-3-18-14/3 *	20"	508	18"	457	2	18"	457	27"	686	96"	2438	209	94.8
FN2054-3-24R or L-14/3 *	20"	508	18"	457	1	24"	610	27"	686	85½"	2172	210	95.3
FN2054-3-24-14/3 *	20"	508	18"	457	2	24"	610	27"	686	108"	2743	214	97.1
FN2054-3-30R or L-14/3 *	20"	508	18"	457	1	30"	762	27"	686	91½"	2324	215	97.5
FN2054-3-30-14/3 *	20"	508	18"	457	2	30"	762	27"	686	120"	3048	244	110.7
FN2054-3-36R or L-14/3 *	20"	508	18"	457	1	36"	914	27"	686	97½"	2477	220	99.8
FN2054-3-36-14/3 *	20"	508	18"	457	2	36"	914	27"	686	132"	3358	259	117.5
FN2060-3-14/3 *	20"	508	20"	508	0	-		27"	686	69"	1753	185	83.9
FN2060-3-18R or L-14/3 *	20"	508	20"	508	1	18"	610	27"	686	85½"	2172	206	93.4
FN2060-3-18-14/3 *	20"	508	20"	508	2	18"	457	27"	686	102"	2591	219	99.3
FN2060-3-24R or L-14/3 *	20"	508	20"	508	1	24"	610	27"	686	91½"	2324	221	100.3
FN2060-3-24-14/3 *	20"	508	20"	508	2	24"	610	27"	686	114"	2896	224	101.6
FN2060-3-30R or L-14/3 *	20"	508	20"	508	1	30"	762	27"	686	97½"	2477	236	107.1
FN2060-3-30-14/3 *	20"	508	20"	508	2	30"	762	27"	686	126"	3200	254	115.2
FN2060-3-36R or L-14/3 *	20"	508	20"	508	1	36"	914	27"	686	103½"	2629	265	120.2
FN2060-3-36-14/3 *	20"	508	20"	508	2	36"	914	27"	686	138"	3505	275	124.7
FN2472-3-14/3 *	24"	610	24"	610	0	-		31"	787	81"	2057	200	90.7
FN2472-3-18R or L-14/3 *	24"	610	24"	610	1	18"	457	31"	787	97½"	2477	226	102.5
FN2472-3-18-14/3 *	24"	610	24"	610	2	18"	457	31"	787	114"	2896	249	113.0
FN2472-3-24R or L-14/3 *	24"	610	24"	610	1	24"	610	31"	787	103½"	2629	240	108.9
FN2472-3-24-14/3 *	24"	610	24"	610	2	24"	610	31"	787	126"	3200	260	117.9
FN2472-3-30R or L-14/3 *	24"	610	24"	610	1	30"	762	31"	787	109½"	2769	270	122.5
FN2472-3-30-14/3 *	24"	610	24"	610	2	30"	762	31"	787	138"	3505	304	137.9
FN2472-3-36R or L-14/3 *	24"	610	24"	610	1	36"	914	31"	787	115½"	2934	310	140.6
FN2472-3-36-14/3 *	24"	610	24"	610	2	36"	914	31"	787	150"	3810	319	144.7
FN2860-3-14/3 *	28"	711	20"	508	0	-		35"	889	69"	1753	252	114.3
FN2860-3-18R or L-14/3 *	28"	711	20"	508	1	18"	457	35"	889	85½"	2172	299	135.6
FN2860-3-18-14/3 *	28"	711	20"	508	2	18"	457	35"	889	102"	2591	360	163.3
FN2860-3-24R or L-14/3 *	28"	711	20"	508	1	24"	610	35"	889	91½"	2324	310	140.6
FN2860-3-24-14/3 *	28"	711	20"	508	2	24"	610	35"	889	114"	2896	356	161.5
FN2860-3-30R or L-14/3 *	28"	711	20"	508	1	30"	762	35"	889	97½"	2477	315	142.9
FN2860-3-30-14/3 *	28"	711	20"	508	2	30"	762	35"	889	126"	3200	375	170.1
FN2860-3-36R or L-14/3 *	28"	711	20"	508	1	36"	914	35"	889	103½"	2629	326	147.9
FN2860-3-36-14/3 *	28"	711	20"	508	2	36"	914	35"	889	138"	3505	434	196.9

* Features two sets of faucet holes.

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA

Phone: 302-653-3000 or 800-441-8440 • Fax: 302-653-2065

www.eaglegrp.com • www.eaglehmc.com

Printed in U.S.A.

©2024 by Eagle Group

Rev. 06/24

Spec sheets available for viewing, printing or downloading from our online literature library at our websites

Although every attempt has been made to ensure the accuracy of the information provided, we cannot be held responsible for typographical or printing errors. Information and specifications are subject to change without notice. Please confirm at time of order.




Profit from the Eagle Advantage®

Specification Sheet

Short Form Specifications

Eagle Spec-Master® Four-Compartment Sinks, model _____, Unit constructed of 14 gauge 300 series, 18-8 stainless steel throughout. Sink bowls covered with a full $\frac{5}{8}$ " radius, and shall have a 14" water level. Drainboards, when required, shall be "V" creased for positive drainage. 9 $\frac{1}{2}$ " high backsplash with 1" upturn and tile edge. Legs to be 1 $\frac{1}{2}$ " O.D., stainless steel, with stainless steel gussets, stainless steel crossbracing and adjustable stainless steel bullet feet.

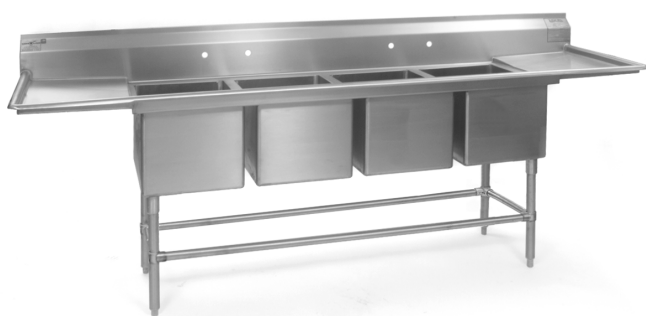

4-compartment sink

Options / Accessories

- | | |
|--|--|
| ☐ Lever drain | ☐ Faucets |
| ☐ Lever drain with overflow | ☐ Polyboard sink covers |
| ☐ Twist handle drains | ☐ Stainless steel sink covers |
| ☐ Overflow hole | ☐ Skirted front panel |
| ☐ Sink kits | |

Assembly:

- Entire assembly is fuse-welded and planished, providing a one-piece seamless sink unit.
- Welded areas are high-speed belt blended to match adjacent surfaces with continuity of satin finish.
- All outside corners of assembly are bullnosed to provide safe, clean edges.
- Water supply is $\frac{1}{2}$ " (13mm) NPS for hot and cold lines.

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA
 Phone: 302-653-3000 • 800-441-8440 • Fax: 302-653-2065
www.eaglegrp.com
www.eaglegrpnews.com
www.eaglegrp.com

For custom configuration or fabrication needs, contact our SpecFAB® Division.
 Phone: 302-653-3000 • Fax: 302-653-2065 • e-mail: quotes@eaglegrp.com

Item No.: _____
 Project No.: _____
 S.I.S. No.: _____

Spec-Master® FN Series Coved Corner Four-Compartment Sinks

MODELS:

- | | |
|-------------------------------------|-------------------------------------|
| ☐ FN2064-4-* | ☐ FN2496-4-* |
| ☐ FN2072-4-* | ☐ FN2880-4-* |
| ☐ FN2080-4-* | |

* See table on back for complete model numbers.

Top:

- Drainboards, backsplash and rolled rims are 14 gauge 300 series stainless steel.
- Drainboards, when provided, are integrally welded.
- All rolled edges are highlighted for enhanced appearance.
- 9 $\frac{1}{2}$ " high backsplash with 1" upturn and tile edge.
- 1 $\frac{1}{8}$ " (29mm) faucet holes punched on 8" (203mm) centers.

Base:

- Legs: 1 $\frac{1}{2}$ " (41mm)-diameter stainless steel tubing with stainless steel gussets and fully adjustable stainless steel bullet feet.
- Crossbracing: Adjustable, 1 $\frac{1}{4}$ " (32mm)-diameter stainless steel; running left-to-right and front-to-back.
- Leg locations fall directly under sink bowls*, providing increased stability and maximum weight support.
- Leg gussets welded to a die-cut heavy-gauge stainless steel reinforcing corner plate.
- Legs are crossbraced on all sides for increased stability.

Sink Bowls:

- 14 gauge 300 series stainless steel.
- 14" (356mm) water level, 17" (432mm) flood level.
- Sink compartments are coved on a full $\frac{5}{8}$ " (41mm) radius and constructed using state-of-the-art seamless welding techniques.
- Basket-type waste drain fits sink bowls' 3 $\frac{1}{2}$ " (89mm) opening and features 1 $\frac{1}{2}$ " (38mm) outlet.

* On sinks with drainboard(s) 30" or longer, legs are located underneath the outer end of drainboard(s).

Certifications / Approvals



AutoQuotes






Profit from the Eagle Advantage®


Item No.: _____
 Project No.: _____
 S.I.S. No.: _____

Spec-Master® FN Series Coved Corner Four-Compartment Sinks

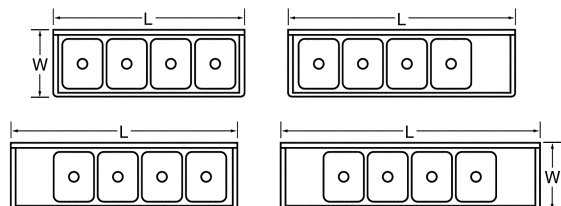

Drain location for rough-in

bowl width in. mm	bowl length in. mm	Dimension A	
20" 508	16" 406	14"	356
20" 508	18" 457	14"	356
20" 508	20" 508	14"	356
24" 610	24" 610	16"	406
28" 711	20" 508	18"	457



model #	BOWL DIMENSIONS				quantity	DRAINBOARD		OVERALL DIMENSIONS				weight	
	width in. mm	length in. mm	width in. mm	length in. mm		length in. mm	length in. mm	width in. mm	length in. mm	width in. mm	length in. mm	lbs.	kg
FN2064-4-14/3	20"	508	16"	406	0	-	-	27"	686	75"	1905	251	113.9
FN2064-4-18R or L-14/3	20"	508	16"	406	1	18"	457	27"	686	91½"	2324	273	123.4
FN2064-4-18-14/3	20"	508	16"	406	2	18"	457	27"	686	108"	2743	312	141.5
FN2064-4-24R or L-14/3	20"	508	16"	406	1	24"	610	27"	686	97½"	2477	308	139.7
FN2064-4-24-14/3	20"	508	16"	406	2	24"	610	27"	686	120"	3048	355	161.0
FN2064-4-30R or L-14/3	20"	508	16"	406	1	30"	762	27"	686	104"	2642	326	147.9
FN2064-4-30-14/3	20"	508	16"	406	2	30"	762	27"	686	132"	3353	361	163.8
FN2064-4-36R or L-14/3	20"	508	16"	406	1	36"	914	27"	686	109½"	2781	356	161.5
FN2064-4-36-14/3	20"	508	16"	406	2	36"	914	27"	686	144"	3658	392	177.8
FN2072-4-14/3	20"	508	18"	457	0	-	-	27"	686	83"	2108	282	127.9
FN2072-4-18R or L-14/3	20"	508	18"	457	1	18"	457	27"	686	99½"	2527	289	131.1
FN2072-4-18-14/3	20"	508	18"	457	2	18"	457	27"	686	116"	2946	339	153.8
FN2072-4-24R or L-14/3	20"	508	18"	457	1	24"	610	27"	686	105½"	2680	328	148.8
FN2072-4-24-14/3	20"	508	18"	457	2	24"	610	27"	686	128"	3251	373	169.2
FN2072-4-30R or L-14/3	20"	508	18"	457	1	30"	762	27"	686	112"	2845	367	166.5
FN2072-4-30-14/3	20"	508	18"	457	2	30"	762	27"	686	140"	3556	407	184.6
FN2072-4-36R or L-14/3	20"	508	18"	457	1	36"	914	27"	686	117½"	2985	401	181.9
FN2072-4-36-14/3	20"	508	18"	457	2	36"	914	27"	686	152"	3861	441	200.0
FN2080-4-14/3	20"	508	20"	508	0	-	-	27"	686	91"	2311	293	132.9
FN2080-4-18R or L-14/3	20"	508	20"	508	1	18"	457	27"	686	107½"	2731	321	145.6
FN2080-4-18-14/3	20"	508	20"	508	2	18"	457	27"	686	124"	3150	362	164.2
FN2080-4-24R or L-14/3	20"	508	20"	508	1	24"	610	27"	686	113½"	2883	328	148.8
FN2080-4-24-14/3	20"	508	20"	508	2	24"	610	27"	686	136"	3454	396	179.6
FN2080-4-30R or L-14/3	20"	508	20"	508	1	30"	762	27"	686	119½"	3035	407	184.6
FN2080-4-30-14/3	20"	508	20"	508	2	30"	762	27"	686	148"	3759	452	205.0
FN2080-4-36R or L-14/3	20"	508	20"	508	1	36"	914	27"	686	125½"	3188	445	201.9
FN2080-4-36-14/3	20"	508	20"	508	2	36"	914	27"	686	160"	4064	490	222.3
FN2496-4-14/3	24"	610	24"	610	0	-	-	31"	787	107"	2718	416	188.7
FN2496-4-18R or L-14/3	24"	610	24"	610	1	18"	457	31"	787	123½"	3137	444	201.4
FN2496-4-18-14/3	24"	610	24"	610	2	18"	457	31"	787	140"	3556	485	220.0
FN2496-4-24R or L-14/3	24"	610	24"	610	1	24"	610	31"	787	129½"	3289	451	204.6
FN2496-4-24-14/3	24"	610	24"	610	2	24"	610	31"	787	152"	3861	519	235.4
FN2496-4-30R or L-14/3	24"	610	24"	610	1	30"	762	31"	787	135½"	3442	530	240.4
FN2496-4-30-14/3	24"	610	24"	610	2	30"	762	31"	787	164"	4166	585	265.4
FN2496-4-36R or L-14/3	24"	610	24"	610	1	36"	914	31"	787	141½"	3594	578	262.2
FN2496-4-36-14/3	24"	610	24"	610	2	36"	914	31"	787	176"	4470	623	282.6
FN2880-4-14/3	28"	711	20"	508	0	-	-	35"	889	91"	2311	404	183.3
FN2880-4-18R or L-14/3	28"	711	20"	508	1	18"	457	35"	889	107½"	2731	431	195.5
FN2880-4-18-14/3	28"	711	20"	508	2	18"	457	35"	889	124"	3150	471	213.7
FN2880-4-24R or L-14/3	28"	711	20"	508	1	24"	610	35"	889	113½"	2883	438	198.7
FN2880-4-24-14/3	28"	711	20"	508	2	24"	610	35"	889	136"	3454	504	228.6
FN2880-4-30R or L-14/3	28"	711	20"	508	1	30"	762	35"	889	119½"	3048	515	233.6
FN2880-4-30-14/3	28"	711	20"	508	2	30"	762	35"	889	148"	3759	569	258.1
FN2880-4-36R or L-14/3	28"	711	20"	508	1	36"	914	35"	889	125½"	3188	562	254.9
FN2880-4-36-14/3	28"	711	20"	508	2	36"	914	35"	889	160"	4064	605	274.4

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA

Phone: 302-653-3000 or 800-441-8440 • Fax: 302-653-2065

www.eaglegrp.com • www.eaglegrpnews.com • www.eaglehmc.com

Printed in U.S.A.
©2023 by Eagle Group

Rev. 01/23

Spec sheets available for viewing, printing or downloading from our online literature library at our websites

Although every attempt has been made to ensure the accuracy of the information provided, we cannot be held responsible for typographical or printing errors. Information and specifications are subject to change without notice. Please confirm at time of order.