



Profit from the Eagle Advantage®

## Specification Sheet

### Short Form Specifications

Eagle AdjusTable® Work Surface System with Cantilevered Overhead System, model \_\_\_\_\_. Heavy gauge brushed stainless steel top with choice of base combination: one wire undershelf and one C-frame or H-frame, or two C-frames or H-frames. Two 12"-wide (chrome, stainless steel) cantilevered overshelves. Two 33" front posts and two 63" rear posts. Wire undershelves feature patented QuadTruss® design (patent #5,390,803).



*AdjusTable® with Cantilevered Overhead System  
—shown with two C-frame bases*

### Options / Accessories

- |                                  |                                                  |
|----------------------------------|--------------------------------------------------|
| <input type="checkbox"/> Drawers | <input type="checkbox"/> Utility drawers**       |
| <input type="checkbox"/> Lock    | <input type="checkbox"/> Keyboard station**      |
| <input type="checkbox"/> Casters | <input type="checkbox"/> Additional undershelves |

\*\* See back page for these options.

### EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA  
Phone: 302-653-3000 • 800-441-8440 • Fax: 302-653-2065  
[www.eaglegrp.com](http://www.eaglegrp.com)  
[www.eaglehmc.com](http://www.eaglehmc.com)

For custom configuration or fabrication needs, contact our **SpecFAB® Division**.  
Phone: 302-653-3000 • Fax: 302-653-2065 • e-mail: [quotes@eaglegrp.com](mailto:quotes@eaglegrp.com)

Item No.: \_\_\_\_\_  
Project No.: \_\_\_\_\_  
S.I.S. No.: \_\_\_\_\_

## AdjusTable® Work Surface System with Cantilevered Overhead System

### MODELS:

- |                                   |                                   |                                   |                                   |
|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| <input type="checkbox"/> OA*2436* | <input type="checkbox"/> OA*3036* | <input type="checkbox"/> OA*3636* | <input type="checkbox"/> KBD-1/SS |
| <input type="checkbox"/> OA*2448* | <input type="checkbox"/> OA*3048* | <input type="checkbox"/> OA*3648* | <input type="checkbox"/> 501571   |
| <input type="checkbox"/> OA*2460* | <input type="checkbox"/> OA*3060* | <input type="checkbox"/> OA*3660* | <input type="checkbox"/> 501572   |

\* See charts for complete model numbers.

# adjusTable®

### Design and Construction Features on All Units

- Stainless steel work surface available in solid or perforated, with brushed finish.
- All work surface tabletops feature hat channel underneath for added strength.
- Two 33" (838mm) front posts.
- Two 63" (1600mm) rear posts.
- All posts are numbered in 1" (25mm) increments for flexible and level positioning of the base that you choose. Available in chrome or stainless steel finish.
- Two 12" (305mm)-wide chrome or stainless steel cantilevered shelves mount to rear posts.
- Base combination available with or without wire undershelf, with chrome or stainless steel H-frame(s) or C-frame(s).
- An almost unlimited number of custom configurations can be created by adding undershelves.
- 34½" (876mm) working height.


### Certifications / Approvals





Profit from the Eagle Advantage®

## AdjusTable® Work Surface Systems with Cantilevered Overhead System

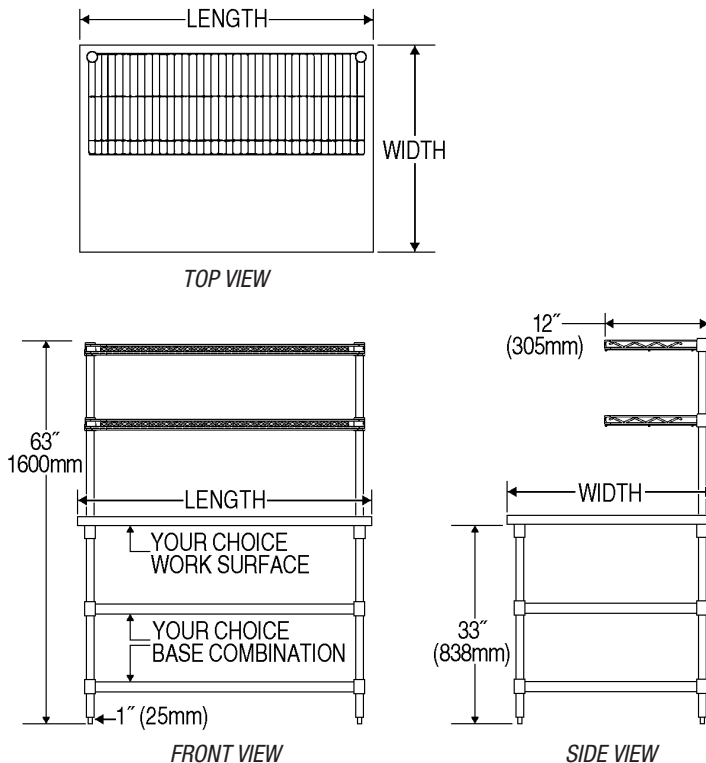

### "OAC" Series Tables

Brushed 16/304 stainless steel solid top and chrome cantilevered overshelves, with choice of:

- Two knocked down chrome C-frames
- Two knocked down chrome H-frames
- One chrome C-frame and one chrome wire undershelf
- One chrome H-frame and one chrome wire undershelf
- Two chrome wire undershelves

length		weight		WITH TWO C-FRAMES	WITH TWO H-FRAMES	WITH ONE C-FRAME AND ONE WIRE SHELF	WITH ONE H-FRAME AND ONE WIRE SHELF	WITH TWO WIRE SHELVES
in.	mm	lb.	kg	model #	model #	model #	model #	model #
24" x 36"	610 x 914	65	29.5	OAC2436T-2C	OAC2436T-2H	OAC2436T-1C-1W	OAC2436T-1H-1W	OAC2436T-2W
24" x 48"	610 x 1219	81	36.7	OAC2448T-2C	OAC2448T-2H	OAC2448T-1C-1W	OAC2448T-1H-1W	OAC2448T-2W
24" x 60"	610 x 1524	97	44.0	OAC2460T-2C	OAC2460T-2H	OAC2460T-1C-1W	OAC2460T-1H-1W	OAC2460T-2W
30" x 36"	762 x 914	75	34.0	OAC3036T-2C	OAC3036T-2H	OAC3036T-1C-1W	OAC3036T-1H-1W	OAC3036T-2W
30" x 48"	762 x 1219	94	42.6	OAC3048T-2C	OAC3048T-2H	OAC3048T-1C-1W	OAC3048T-1H-1W	OAC3048T-2W
30" x 60"	762 x 1524	113	51.3	OAC3060T-2C	OAC3060T-2H	OAC3060T-1C-1W	OAC3060T-1H-1W	OAC3060T-2W
36" x 36"	914 x 914	85	38.6	OAC3636T-2C	OAC3636T-2H	OAC3636T-1C-1W	OAC3636T-1H-1W	OAC3636T-2W
36" x 48"	914 x 1219	108	49.0	OAC3648T-2C	OAC3648T-2H	OAC3648T-1C-1W	OAC3648T-1H-1W	OAC3648T-2W
36" x 60"	914 x 1524	131	59.4	OAC3660T-2C	OAC3660T-2H	OAC3660T-1C-1W	OAC3660T-1H-1W	OAC3660T-2W

Spec sheets available for viewing, printing or downloading from our online literature library at our websites

## Adjustable® Work Surface Systems with Cantilevered Overhead System

### “OAS” Series Tables

Brushed 16/304 stainless steel solid top and stainless steel cantilevered overshelves, with choice of:

- Two knocked down stainless steel C-frames
- Two knocked down stainless steel H-frames
- One stainless steel C-frame and one stainless steel wire undershelf
- One stainless steel H-frame and one chrome wire undershelf
- Two stainless steel wire undershelves

length		weight		WITH TWO C-FRAMES	WITH TWO H-FRAMES	WITH ONE C-FRAME AND ONE WIRE SHELF	WITH ONE H-FRAME AND ONE WIRE SHELF	WITH TWO WIRE SHELVES
in.	mm	lb.	kg	model #	model #	model #	model #	model #
24" x 36"	610 x 914	65	29.5	OAS2436T-2C	OAS2436T-2H	OAS2436T-1C-1W	OAS2436T-1H-1W	OAS2436T-2W
24" x 48"	610 x 1219	81	36.7	OAS2448T-2C	OAS2448T-2H	OAS2448T-1C-1W	OAS2448T-1H-1W	OAS2448T-2W
24" x 60"	610 x 1524	97	44.0	OAS2460T-2C	OAS2460T-2H	OAS2460T-1C-1W	OAS2460T-1H-1W	OAS2460T-2W
30" x 36"	762 x 914	75	34.0	OAS3036T-2C	OAS3036T-2H	OAS3036T-1C-1W	OAS3036T-1H-1W	OAS3036T-2W
30" x 48"	762 x 1219	94	42.6	OAS3048T-2C	OAS3048T-2H	OAS3048T-1C-1W	OAS3048T-1H-1W	OAS3048T-2W
30" x 60"	762 x 1524	113	51.3	OAS3060T-2C	OAS3060T-2H	OAS3060T-1C-1W	OAS3060T-1H-1W	OAS3060T-2W
36" x 36"	914 x 914	85	38.6	OAS3636T-2C	OAS3636T-2H	OAS3636T-1C-1W	OAS3636T-1H-1W	OAS3636T-2W
36" x 48"	914 x 1219	108	49.0	OAS3648T-2C	OAS3648T-2H	OAS3648T-1C-1W	OAS3648T-1H-1W	OAS3648T-2W
36" x 60"	914 x 1524	131	59.4	OAS3660T-2C	OAS3660T-2H	OAS3660T-1C-1W	OAS3660T-1H-1W	OAS3660T-2W

### “OAP” Series Tables

Brushed 14/304 stainless steel perforated\* top (3/4"-diameter holes on 1" center) and stainless steel cantilevered overshelves, with choice of:

\* For perforated tops, laminar air flow is 23-25%, depending on size.

- Two knocked down stainless steel C-frames
- Two knocked down stainless steel H-frames
- One stainless steel C-frame and one stainless steel wire undershelf
- One stainless steel H-frame and one stainless steel wire undershelf
- Two stainless steel wire undershelves

length		weight		WITH TWO C-FRAMES	WITH TWO H-FRAMES	WITH ONE C-FRAME AND ONE WIRE SHELF	WITH ONE H-FRAME AND ONE WIRE SHELF	WITH TWO WIRE SHELVES
in.	mm	lb.	kg	model #	model #	model #	model #	model #
24" x 36"	610 x 914	65	29.5	OAP2436T-2C	OAP2436T-2H	OAP2436T-1C-1W	OAP2436T-1H-1W	OAP2436T-2W
24" x 48"	610 x 1219	81	36.7	OAP2448T-2C	OAP2448T-2H	OAP2448T-1C-1W	OAP2448T-1H-1W	OAP2448T-2W
24" x 60"	610 x 1524	97	44.0	OAP2460T-2C	OAP2460T-2H	OAP2460T-1C-1W	OAP2460T-1H-1W	OAP2460T-2W
30" x 36"	762 x 914	75	34.0	OAP3036T-2C	OAP3036T-2H	OAP3036T-1C-1W	OAP3036T-1H-1W	OAP3036T-2W
30" x 48"	762 x 1219	94	42.6	OAP3048T-2C	OAP3048T-2H	OAP3048T-1C-1W	OAP3048T-1H-1W	OAP3048T-2W
30" x 60"	762 x 1524	113	51.3	OAP3060T-2C	OAP3060T-2H	OAP3060T-1C-1W	OAP3060T-1H-1W	OAP3060T-2W
36" x 36"	914 x 914	85	38.6	OAP3636T-2C	OAP3636T-2H	OAP3636T-1C-1W	OAP3636T-1H-1W	OAP3636T-2W
36" x 48"	914 x 1219	108	49.0	OAP3648T-2C	OAP3648T-2H	OAP3648T-1C-1W	OAP3648T-1H-1W	OAP3648T-2W
36" x 60"	914 x 1524	131	59.4	OAP3660T-2C	OAP3660T-2H	OAP3660T-1C-1W	OAP3660T-1H-1W	OAP3660T-2W



Item No.: \_\_\_\_\_  
Project No.: \_\_\_\_\_  
S.I.S. No.: \_\_\_\_\_


## Adjustable® Work Surface Systems with Cantilevered Overhead System

## Options

## Optional Table Mount Keyboard Station

20½" wide x 11½" deep (521 x 292mm).

weight		stainless steel KBD-1/SS
lbs.	kg	
60	27	



## Optional Utility Drawers

Stainless steel construction. Guides and rollers included.

						WITH PULL FLANGE AND PULL FRONT			ENCLOSED * ASSEMBLY		
length		width		height		weight			weight		
in.	mm	in.	mm	in.	mm	lbs.	kg	model #	lbs.	kg	model #
20"	508	20"	508	5"	127	25	11.3	501571	35	15.9	501572

\* Assembly comes complete with housing, drawer, drawer pan, and drawer front.



#501571



#501572

## NEW Foot Rest

Available for use with adjusTable® systems.

See Spec Sheet **EG04.14****EAGLE GROUP**

**100 Industrial Boulevard, Clayton, DE 19938-8903 USA**

**Phone: 302-653-3000 or 800-441-8440 • Fax: 302-653-2065**

**www.eaglegrp.com • www.eaglemhc.com**

Printed in U.S.A.  
©2025 by Eagle Group

**Rev. 05/25**

**Spec sheets available for viewing, printing or downloading from our online literature library at our websites**

Although every attempt has been made to ensure the accuracy of the information provided, we cannot be held responsible for typographical or printing errors. Information and specifications are subject to change without notice. Please confirm at time of order.