

Specification Sheet

Short Form Specifications

Eagle One-Compartment Utility Sinks, model ______. Constructed of type 304 or 430 stainless steel with square corners, Euro-Style edging on front, and 8" backsplash. All partitions have %" rolled top edge. Faucet holes punched on 8" centers. All outside corners to be bullnosed for clean, safe edges. 1%" O.D. galvanized tubular legs with adjustable bullet feet.



one-compartment utility sink

Options / Accessories

☐ Faucets	Lever waste with overflow
■ Detachable drainboard *	Stainless steel legs
☐ Lever waste	Stainless steel feet

Design and Construction Features:

- For numerous applications when NSF approval is not required (For NSF-approved utility sinks, add prefix "N-" to model number. Example: N-2424-1-16/3)
- Entire assembly is fuse welded and planished, providing a one-piece seamless sink unit.
- 34½" to 35½" (876 to 902mm) working height.

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA
Phone: 302-653-3000 • 800-441-8440 • Fax: 302-653-2065
www.eaglegrp.com
www.eaglegrpnews.com
www.eaglemhc.com

For custom configuration or fabrication needs, contact our **SpecFAB® Division**. Phone: 302-653-3000 • Fax: 302-653-2065 • e-mail: quotes@eaglegrp.com

Item No.:	
Project No.:	
S.I.S. No.:	

One-Compartment Utility Sinks with Square Corner Construction

MODELS:

1818-1-16/4	2136-1-16/3
1818-1-16/3	2424-1-16/4
□ 1824-1-16/4	2424-1-16/3
□ 1824-1-16/3	2436-1-16/4
2118-1-16/4	□ 2436-1-16/3
2118-1-16/3	2124-1-18-16/4
2124-1-16/4	2124-1-18-16/3
2124-1-16/3	2424-1-24-16/4
□ 2136-1-16/4	2424-1-24-16/3

Top:

- · All partitions have euro-style front edge.
- Available with detachable* or welded drainboards.
- 8" (203mm) splash features 2" (51mm) return to wall on 45° angle, with 1" (25mm) upturn.
- 1½" (29mm) faucet holes punched on 8" (203mm) centers.

Legs:

- 1%" (41mm)-diameter heavy-gauge galvanized tubing.
- High-impact corrosion-resistant 1" (25mm) adjustable bullet feet.
- Leg locations fall directly under sink bowl, providing increased stability and maximum weight support.

Sink Bowl:

- 16 gauge type 304 or 430 stainless steel.
- 13\%" (340mm)-deep compartment.
- 12-gauge leg gussets welded to a die-cut heavy-gauge reinforcing plate underneath sink bowl.
- Drain hole is 3½" (89mm)-diameter, recessed, and complete with 1½" (38mm) IPS basket-type waste drain, which is shipped loose.






EG20.13A Rev. 01/23

^{*} See Spec Sheet #EG20.13E for optional detachable drainboards.



Item No.:	_
Project No.:	_
S.I.S. No.:	_


One-Compartment Utility Sinks with Square Corner Construction

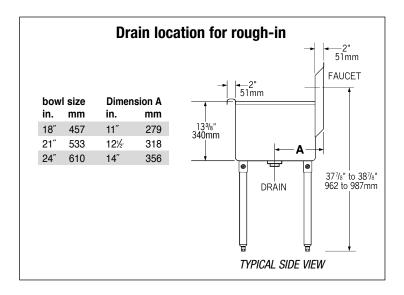



Sinks with No Drainboards

16 gauge type 430 16 gauge type 304		BOWL DIMENSIONS				DRAIN	 OVERALL DIMENSIONS 						
stainless steel	stainless steel	wic	width lengt		gth		length	width		length		we	ight
model #	model #	in.	mm	in.	mm	quantity	in. mm	in.	mm	in.	mm	lbs.	kg
1818-1-16/4	1818-1-16/3	18″	457	18″	457	0	n/a	22"	559	19%"	492	53	24.0
1824-1-16/4	1824-1-16/3	18″	457	24"	610	0	n/a	22″	559	25%"	645	56	25.4
2118-1-16/4	2118-1-16/3	21″	533	18″	457	0	n/a	25"	635	19%"	492	56	25.4
2124-1-16/4	2124-1-16/3	21″	533	24"	610	0	n/a	25"	635	25%"	645	61	27.7
2136-1-16/4	2136-1-16/3	21″	533	36″	914	0	n/a	25″	635	37%"	949	66	29.9
2424-1-16/4	2424-1-16/3	24"	610	24"	610	0	n/a	28″	711	25%"	645	60	27.2
2436-1-16/4	2436-1-16/3	24"	610	36″	914	0	n/a	28″	711	37%"	949	68	30.8



Sinks with Double Drainboards

16 gauge type 430	BOWL DIMENSIONS				DRAIN	 OVERALL DIMENSIONS								
stainless steel	stainless steel	width		width length			length		width		length		weight	
model #	model #	in.	mm	in.	mm	quantity	in.	mm	in.	mm	in.	mm	lbs.	kg
2124-1-18-16/4	2124-1-18-16/3	21″	533	24″	610	2	18″	457	25″	635	60¼"	1530	99	44.9
2424-1-24-16/4	2424-1-24-16/3	24"	610	24"	610	2	24"	610	28″	711	72¼"	1835	108	49.0

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA Phone: 302-653-3000 or 800-441-8440 • Fax: 302-653-2065 www.eaglegrp.com • www.eaglegrpnews.com • www.eaglemhc.com

Printed in U.S.A. ©2023 by Eagle Group

Rev. 01/23



Specification Sheet

Short Form Specifications

Eagle Two-Compartment Utility Sinks, model ______. Constructed of type 304 or 430 stainless steel with square corners, Euro-Style edging on front, and 8" backsplash. All partitions have %" rolled top edge. Faucet holes punched on 8" centers. All outside corners to be bullnosed for clean, safe edges. 1%" O.D. galvanized tubular legs with adjustable bullet feet.



two-compartment u	itility sink
-------------------	--------------

Options / Accessories

☐ Faucets	Lever waste with overflow
☐ Detachable drainboard *	Stainless steel legs
☐ Lever waste	Stainless steel feet

Design and Construction Features:

- For numerous applications when NSF approval is not required (For NSF-approved utility sinks, add prefix "N-" to model number. Example: N-2460-2-16/3)
- Entire assembly is fuse welded and planished, providing a one-piece seamless sink unit.
- 34½" to 35½" (876 to 902mm) working height.

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA Phone: 302-653-3000 • Fax: 302-653-2065 www.eaglegrp.com

Foodservice Division: Phone 800-441-8440 MHC/Retail Display Divisions: Phone 800-637-5100

For custom configuration or fabrication needs, contact our **SpecFAB® Division**. Phone: 302-653-3000 • Fax: 302-653-2065 • e-mail: quotes@eaglegrp.com

Item No.:	
Project No.:	
S.I.S. No.:	

Two-Compartment Utility Sinks with Square Corner Construction

MODELS:

□ 1836-2-16/4	□ 2448-2-16/4
□ 1836-2-16/3	□ 2448-2-16/3
□ 1848-2-16/4	2460-2-16/4
□ 1848-2-16/3	□ <i>2460-2-16/3</i>
□ 2136-2-16/4	□ <i>2136-2-18-16/4</i>
□ 2136-2-16/3	□ 2136-2-18-16/3
□ 2148-2-16/4	□ 2448-2-24-16/4
1 21/12-2-16/2	□ 2112-2-21-16/3

Top:

- · All partitions have euro-style front edge.
- Available with detachable* or welded drainboards.
- 8" (203mm) splash features 2" (51mm) return to wall on 45° angle, with 1" (25mm) upturn.
- 11/6" (29mm) faucet holes punched on 8" (203mm) centers.

Legs:

- 1%" (41mm)-diameter heavy-gauge galvanized tubing.
- High-impact corrosion-resistant 1" (25mm) adjustable bullet feet.
- Leg locations fall directly under sink bowls, providing increased stability and maximum weight support.

Sink Bowls:

- 16 gauge type 304 or 430 stainless steel.
- 13%" (340mm)-deep compartments.
- 12-gauge leg gussets welded to a die-cut heavy-gauge reinforcing plate underneath sink bowls.
- Drain holes are 3½" (89mm)-diameter, recessed, and complete with 1½" (38mm) IPS basket-type waste drains, which is shipped loose.

AUTOQUOTES




EG20.13B Rev. 06/14


^{*} See Spec Sheet #EG20.13E for optional detachable drainboards.



Item No.:	
Project No.:	
S.I.S. No.:	


Two-Compartment Utility Sinks with Square Corner Construction

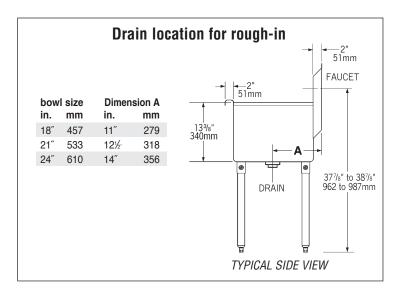



Sinks with No Drainboards

16 gauge type 430	16 gauge type 304	BO	WL DI	MENS	ONS	DRAIN	OVERALL DIMENSIONS						
stainless steel	stainless steel	wic	width		length		length	width		length		wei	ight
model #	model #	in.	mm	in.	mm	quantity	in. mm	in.	mm	in.	mm	lbs.	kg
1836-2-16/4	1836-2-16/3	18″	457	18″	457	0	n/a	22"	559	37%"	991	75	34.0
1848-2-16/4	1848-2-16/3	18″	457	24"	610	0	n/a	22"	559	49%"	1295	80	36.3
2136-2-16/4	2136-2-16/3	21″	533	18″	457	0	n/a	25″	635	37%"	991	80	36.3
2148-2-16/4	2148-2-16/3	21″	533	24"	610	0	n/a	25"	635	49%"	1295	85	38.6
2448-2-16/4	2448-2-16/3	24"	610	24"	610	0	n/a	28″	711	49%"	1295	89	40.4
2460-2-16/4	2460-2-16/3	24"	610	30"	762	l 0	n/a	28″	711	61%"	1600	95	43.1



Sinks with Double Drainboards

	16 gauge type 430	BC	WL DI	MENS	ONS	DRAIN	IBOA	RD	OVE	RALLI	DIMEN	SIONS					
stainless steel		stainless steel	wi	dth	len	igth		len	ngth	wi	dth	length		wei	weight		
	model #	model #	in.	mm	in.	mm	quantity	in.	mm	in.	mm	in.	mm	lbs.	kg		
	2136-2-18-16/4	2136-2-18-16/3	21″	533	18″	457	2	18″	457	25″	635	721/4"	1905	120	54.4		
	2448-2-24-16/4	2448-2-24-16/3	24"	610	24"	610	2	24"	610	28″	711	96¼"	2515	139	63.1		

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA

Phone: 302-653-3000 • Fax: 302-653-2065

www.eaglegrp.com

Foodservice Division: Phone 800-441-8440

MHC/Retail Display Divisions: Phone 800-637-5100

Printed in U.S.A. ©2014 by Eagle Group

Rev. 06/14



Specification Sheet

Short Form Specifications

Eagle Three-Compartment Utility Sinks, model ______. Constructed of type 304 or 430 stainless steel with square corners, Euro-Style edging on front, and 8" backsplash. All partitions have %" rolled top edge. Faucet holes punched on 8" centers. All outside corners to be bullnosed for clean, safe edges. 1%" O.D. galvanized tubular legs with adjustable bullet feet.



three-compartment utility sink

■ Lever waste with overflow

■ Stainless steel legs

☐ Stainless steel feet

Options / Accessories

ш	rauceis		
\Box	Detachable	drainhoard	

- Lever waste

Design and Construction Features:

- For numerous applications when NSF approval is not required (For NSF-approved utility sinks, add prefix "N-" to model number. Example: N-2460-3-16/3)
- Entire assembly is fuse welded and planished, providing a one-piece seamless sink unit.
- 34½" to 35½" (876 to 902mm) working height.

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA Phone: 302-653-3000 • Fax: 302-653-2065 www.eaglegrp.com

Foodservice Division: Phone 800-441-8440 MHC/Retail Display Divisions: Phone 800-637-5100

For custom configuration or fabrication needs, contact our **SpecFAB® Division**. Phone: 302-653-3000 • Fax: 302-653-2065 • e-mail: quotes@eaglegrp.com

Item No.:	
Project No.:	
S.I.S. No.:	

Three-Compartment Utility Sinks with Square Corner Construction

MODELS:

□ 1836-3-16/4	2136-3-16/3	2448-3-16/4	2136-3-18-16/3
□ 1836-3-16/3	2148-3-16/4	2448-3-16/3	2148-3-18-16/
□ 1848-3-16/4	2148-3-16/3	2460-3-16/4	2148-3-18-16/3
□ 1848-3-16/3	2154-3-16/4	2460-3-16/3	2154-3-18-16/
□ 1854-3-16/4	□ 2154-3-16/3	2472-3-16/4	2154-3-18-16/3
□ 1854-3-16/3	2160-3-16/4	2472-3-16/3	2472-3-24-16/
□ 2136-3-16/4	□ <i>2160-3-16/3</i>	□ 2136-3-18-16/4	□ 2472-3-24-16/3

Top:

- All partitions have euro-style front edge.
- · Available with detachable* or welded drainboards.
- 8" (203mm) splash features 2" (51mm) return to wall on 45° angle, with 1" (25mm) upturn.
- 1½" (29mm) faucet holes punched on 8" (203mm) centers.

Legs:

- 1%" (41mm)-diameter heavy-gauge galvanized tubing.
- High-impact corrosion-resistant 1" (25mm) adjustable bullet feet.
- Leg locations fall directly under sink bowls, providing increased stability and maximum weight support.

Sink Bowls:

- 16 gauge type 304 or 430 stainless steel.
- 13%" (340mm)-deep compartments.
- 12-gauge leg gussets welded to a die-cut heavy-gauge reinforcing plate underneath sink bowls.
- \bullet Drain hole is 3%'' (89mm)-diameter recessed and complete with 1%'' (38mm) IPS basket-type waste drain, which is shipped loose.

AUTOQUOTES




EG20.13C Rev. 06/14


 $^{^{\}star}$ See Spec Sheet # EG20.13E for optional detachable drainboards.



Item No.: .	
Project No.: .	
S.I.S. No.: .	

Three-Compartment Utility Sinks with Square Corner Construction

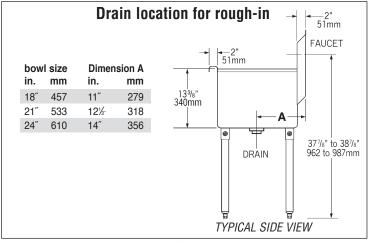




Sinks with No Drainboards

16 gauge type 430	16 gauge type 304				DRAINBOARD OVERALL DIMENSIONS						ĺ		
stainless steel	stainless steel	wic	dth	leng	gth		length	wie	width lengt		gth	ıth weight	
model #	model #	in.	mm	in.	mm	quantity	in. mm	in.	mm	in.	mm	lbs.	kg
1836-3-16/4	1836-3-16/3	18″	457	12"	305	0	n/a	22″	559	37%"	949	79	35.8
1848-3-16/4	1848-3-16/3	18″	457	16″	406	0	n/a	22″	559	49%"	1254	90	40.8
1854-3-16/4	1854-3-16/3	18″	457	18″	457	0	n/a	22"	559	55%"	1406	97	44.0
2136-3-16/4	2136-3-16/3	21"	533	12″	305	0	n/a	25″	635	37%"	949	85	38.6
2148-3-16/4	2148-3-16/3	21″	533	16″	406	0	n/a	25″	635	49%"	1254	87	39.5
2154-3-16/4	2154-3-16/3	21″	533	18″	457	0	n/a	25"	635	55%"	1406	100	45.4
2160-3-16/4*	2160-3-16/3*	21″	533	20″	508	0	n/a	25″	635	61%"	1559	110	49.9
2448-3-16/4	2448-3-16/3	24"	610	16″	406	0	n/a	28″	711	49%"	1254	92	41.7
2460-3-16/4*	2460-3-16/3*	24"	610	20"	508	0	n/a	28″	711	61%"	1559	115	52.2
2472-3-16/4*	2472-3-16/3*	24"	610	24"	610	0	n/a	28″	711	73%"	1864	125	56.7

^{*} Includes two sets of faucet holes.



Sinks with Double Drainboards

16 gauge type 4 stainless stee		1	BOWL DIMENSIONS width length		DRAINBOARD length		OVERALL DIMENSIONS width length			weight					
model #	model #		in.	mm	in.	mm	quantity	in.	mm	in.	mm	in.	mm	lbs.	kg
2136-3-18-16	<i>/</i> 4 <i>2136-3-18-16/3</i>		21″	533	12"	305	2	18″	457	25″	635	721/4"	1835	125	56.7
2148-3-18-16	/4 2148-3-18-16/3		21″	533	16″	406	2	18″	457	25″	635	841/4"	2140	127	57.6
2154-3-18-16	/4 2154-3-18-16/3		21″	533	18″	457	2	18″	457	25″	635	90¼"	2292	140	63.5
2472-3-24-16	/4* 2472-3-24-16/3*		24″	610	24"	610	2	24"	610	28″	711	1201/4"	3054	175	79.4

^{*} Includes two sets of faucet holes.

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA

Phone: 302-653-3000 • Fax: 302-653-2065

www.eaglegrp.com

Foodservice Division: Phone 800-441-8440 MHC/Retail Display Divisions: Phone 800-637-5100

Printed in U.S.A.
©2014 by Eagle Group

Rev. 06/14



Specification Sheet

Short Form Specifications

Eagle Four-Compartment Utility Sinks, model ______. Constructed of type 304 or 430 stainless steel with square corners, Euro-Style edging on front, and 8" backsplash. All partitions have %" rolled top edge. Faucet holes punched on 8" centers (set of two). All outside corners to be bullnosed for clean, safe edges. 1%" O.D. galvanized tubular legs with adjustable bullet feet.



iour-companinent utility sink

 nti	anc		\mathbf{n}	00	ററ	-	00
 	ons	. , ,	41.I.		NII		->

☐ Faucets	Lever waste with overflow
Detachable drainboard *	Stainless steel legs
■ Lever waste	Stainless steel feet

Design and Construction Features:

- For numerous applications when NSF approval is not required (For NSF-approved utility sinks, add prefix "N-" to model number. Example: N-2460-2-16/3)
- Entire assembly is fuse welded and planished, providing a one-piece seamless sink unit.
- 34½" to 35½" (876 to 902mm) working height.

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA Phone: 302-653-3000 • Fax: 302-653-2065 www.eaglegrp.com

Foodservice Division: Phone 800-441-8440 MHC/Retail Display Divisions: Phone 800-637-5100

For custom configuration or fabrication needs, contact our **SpecFAB® Division.** Phone: 302-653-3000 • Fax: 302-653-2065 • e-mail: quotes@eaqlegrp.com

Item No.:	
Project No.:	
S.I.S. No.:	

Four-Compartment Utility Sinks with Square Corner Construction

MODELS:

- **□** 1872-4-16/4
- **□** 1872-4-16/3
- **□** 2172-4-16/4
- **□** 2172-4-16/3
- **□** 2472-4-16/4
- **□** 2472-4-16/3
- □ *2172-4-18-16/4*
- **□** 2172-4-18-16/3

Top:

- All partitions have euro-style front edge.
- · Available with detachable* or welded drainboards.
- 8" (203mm) splash features 2" (51mm) return to wall on 45° angle, with 1" (25mm) upturn.
- Set of two 1½" (29mm) faucet holes punched on 8" (203mm) centers.

Legs:

- 1%" (41mm)-diameter heavy-gauge galvanized tubing.
- High-impact corrosion-resistant 1" (25mm) adjustable bullet feet.
- Leg locations fall directly under sink bowls, providing increased stability and maximum weight support.

Sink Bowls:

- 16 gauge type 304 or 430 stainless steel.
- 13%" (340mm)-deep compartments.
- 12-gauge leg gussets welded to a die-cut heavy-gauge reinforcing plate underneath sink bowls.
- Drain holes are 3½" (89mm)-diameter, recessed, and complete with 1½" (38mm) IPS basket-type waste drains, which is shipped loose.

AUTOQUOTES




EG20.13D Rev. 06/14


 $^{^{\}star}$ See Spec Sheet #EG20.13E for optional detachable drainboards.



Item No.:	_
Project No.:	_
S.I.S. No.:	_


Four-Compartment Utility Sinks with Square Corner Construction

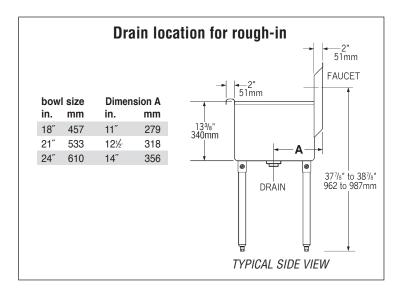



Sinks with No Drainboards

16 gauge type 430 stainless steel	16 gauge type 304 stainless steel		BOWL DIMENSIONS width length		DRAINBOARD length			OVERALL DIMENSIONS width length			weight			
model #	model #	in.	mm	in.	mm	quantity	in.	mm	in.	mm	in.	mm	lbs.	kg
1872-4-16/4	1872-4-16/3	18″	457	18″	457	0	n/a	n/a		559	73%"	1864	110	49.9
2172-4-16/4	2172-4-16/3	21″	533	18″	457	0	n/	a	25″	635	73%"	1864	115	52.2
2472-4-16/4	2472-4-16/3	24"	610	18″	457	0	n/a	а	28″	711	73%"	1864	125	56.7



Sinks with Double Drainboards

16 gauge type 430	16 gauge type 304	BO	WL DI	MENSI	ONS	DRAINBOARD			OVERALL DIMENSIONS					
stainless steel	stainless steel	width		length		length		gth	width		length		weight	
model #	model #	in.	mm	in.	mm	quantity	in.	mm	in.	mm	in.	mm	lbs.	kg
2172-4-18-16/4	2172-4-18-16/3	21″	533	18″	457	2	18″	457	25″	635	108¼″	2750	155	70.3

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA

Phone: 302-653-3000 • Fax: 302-653-2065

www.eaglegrp.com

Foodservice Division: Phone 800-441-8440 MHC/Retail Display Divisions: Phone 800-637-5100

Printed in U.S.A. ©2014 by Eagle Group Rev. 06/14